

Product Catalog








North American Distribution Center



w w w . e n d o t o c o r p . c o m



USA Office	Turkey Office	Germany Office	U.A.E Office
USA & North America  North American Distribution Center  	Australia Bulgaria Georgia Greece Malta Turkmenistn Israel Kazakhstan Poland Romnia Singapore	Italy Lithuania Luxembourg Netherlands Spain Sweden Switzerland Austria	Uganda Tanzania Somali Ghana Kanya Kuwait Sauth Africa Nigeria Oman Qatar

 North American Distribution Center 	About Us	4-6
	Solar Powered LED Barricade Flasher and Signs	7-22
	Speed Bumps, Mini Humps, Road Markers and Cables Protector	23-32
	Polyurethane Flexible Delineator Posts and Permanent Bollards	33-43
	Traffic Safety Cones	44-50
	Delineator Markers, Traffic Channelizers, Barricades, Barriers and Vertical Panels	51-61
	Traffic Lane Channelizers, Parking Curbs, Corner Guards and Convex Mirror	62-73
	Accessories, Spare Parts and Installation kits	74-78

Success which comes with experience!

The story of **eveluxusa** begins in 1988, when The Yukselen family established their business 26 years ago producing die injection molds.



The company always had an innovative and creative soul, and provided several different items for the market.

Focused Developing Strategy

After considering service requirements in its field, beginning in 2000 the company decided to specialize and expand in Traffic Safety Equipment field and devote our expertise to this market.

Establishment and Sales Network

By the way of technological investment in 33,500 yd² facility, now the company is implementing the mass production of Traffic Safety Products. Completed the sales network of agents throughout Europe, Africa and UAE. The Company is doing export via **evelux** brand to Europe, based in Germany, Middle East and Africa based in UAE and now with **eveluxusa** partnering with **eNdoto** making products available to the US market.

Leading the Market

The ever increasing traffic is life threatening to drivers and pedestrians. Therefore, it is increasing the number of precautions to provide traffic safety products. We, as **eveluxusa** are producing traffic safety equipment with our continuing R&D studies.

General Application Fields

- Highways
- Roads
- Crossings
- Road Maintenance
- Construction Areas
- School Zones
- All Parking lots
- Industrial areas



Excellent Quality for All Conditions

With the need for high level endurance for all conditions, **eveluxusa** products are capable of all terms of standardization, by high quality production and material. So **eveluxusa** items are used in all fields of traffic safety in the most difficult conditions.

Confirmed Quality

- Long Life Plastic Material
- Resistance to natural weather condition
- UV Resistance
- Resistance to friction
- High quality reflective sheeting and lenses
- Easy Installation and Endurance



Customer Relations

eveluxusa presents its product range and service to their distributors and end users to have diversity with high quality. We are producing brand new items which are technically high level.


Close to Local Markets

Being close to market is a determining factor for success. With our capable partners in the most important export markets and agent network in Europe, Africa, UAE and USA, we carry on our efficiency in local markets and contact with our customers by the most efficient way.



Delivery from Ready Stocks




Evelux delivers the orders to customers from stocks on time! This warrants trust and time saving to its customers.

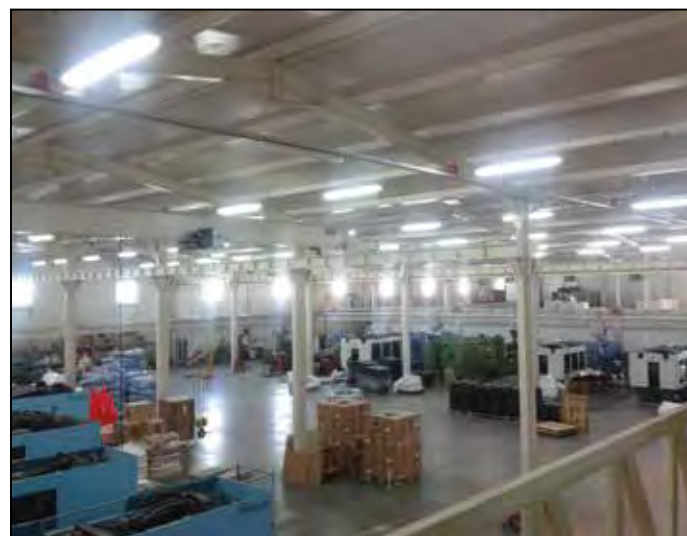

Fast and Effective

To make a fast and effective product, **eveluxusa** has a series of high tech injection machines and automated production line. Production is supplied by high pressure injection molding techniques.

eveluxusa products stand out together with its professional management process and high quality operation.

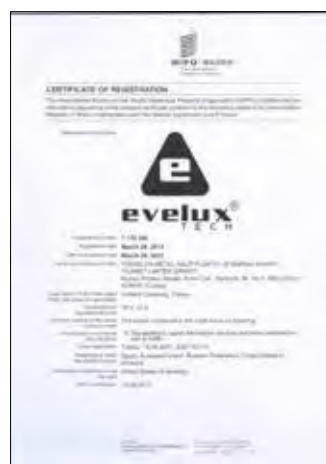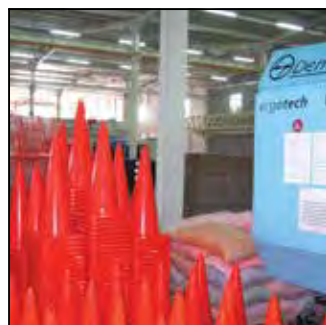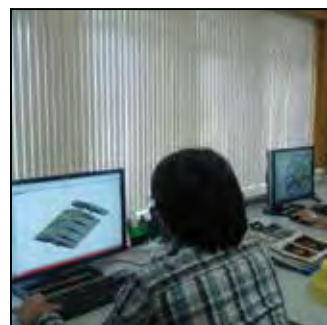

Quality for Trust

By continuing the high quality of our products, we indeed confirm to distributors our leadership in the market.

All Evelux production areas are completely complaint by DIN ISO 9001:2008.

Also to increase the quality of our products, we will continue investing in production, R&D and education of our team.



Solar Powered LED Barricade Flasher and Signs

- Customized panel graphics, including colors, available on request.
- Solar charged battery and LED flashers.
- Cost and energy saving efficient warning.
- Continuous warning with LEDs, reflective sheeted corners and cat eyes circumference in standard lamps and reflective ring in button lamps.
- Can be switched on/off to save battery energy.
- Solar LED signs can be customized design upon requested.
- Premium quality lens surfaces and covers.
- Can be attached to Evelux Delineator adaptor, Cone adaptor, Delineator Marker Posts, Traffic Channelizer Posts, Traffic Control Barricades and Safety Barriers with Vertical Panels
- Wide range of use on road working areas, building areas and hazardous areas.
- The solar panel can be swiveled 3600 or tilted 450.
- The LED sign can be attached to U Channel posts as well as 2"-2.5" / (50-75mm) post.
- Operating temperature range -40F to + 140F








Bi-directional Solar powered LED Barricade Flasher



11811 FL S



11813 FL S

							
Item#	11811 FL S	11813 FL k	11827 FL K	11825 FL S	11817 FL K	11819 FL S	11821 FL M
Dimensions (L x W x H)	3.54"x9.25"x11.41" (90x235x290mm)		3.54"x8.46"x11.41" (90x215x290mm)		D x H 5.04"x5.71" (128x125mm)		
Lens D	6.37" / (162mm)		8.18" / (208mm)				
Weight	1.85 lbs		1.65 lbs		1.32 lbs		
Material	PC lens - ABS cover				PC-PA		
Detailed description.	Solar powered						
	Bi-directional Flasher				Circular Flasher		
	4+4 LEDs				6 LEDs		
	6 Hour Solar Charge = 12 Hours of Operation						
	A reflecting frame sheet		---		360° reflecting sheet		
	ON/OFF switch						
	Can be attached to Evelux Delineator adaptor, Cone adaptor, Delineator Marker Posts, Traffic Channelizer Posts, Traffic Control Barricades and Safety Barriers with Vertical Panels						
ISO Compliant	DIN EN ISO 9001:2008						

Solar Powered LED Barricade Flasher



11827 FL K



11825 FL S



11817 FL K



11819 FL S




11821 FL M

Solar panel specifications	Type	Monocrystalline silicone seal
	Dimensions	4.72"x1.77" (120x45mm)
	Voltage	4.3 V
	Current	80 mA
Battery specifications	Type	Ni-MH
	Current /voltage	2300mA/h-2x1.2V
LED specifications	Color	yellow / red
	Dimension	D 0.19" / (5mm)
	90 flashes per minute	
	Visibility distance	1640' / (500m)
	Operating temperature range	-4°F to + 14°F



Solar Powered Flashing LED Edge Lit Signs (Aluminum Frame)


Customized panel graphics, including colors and panel size available on request

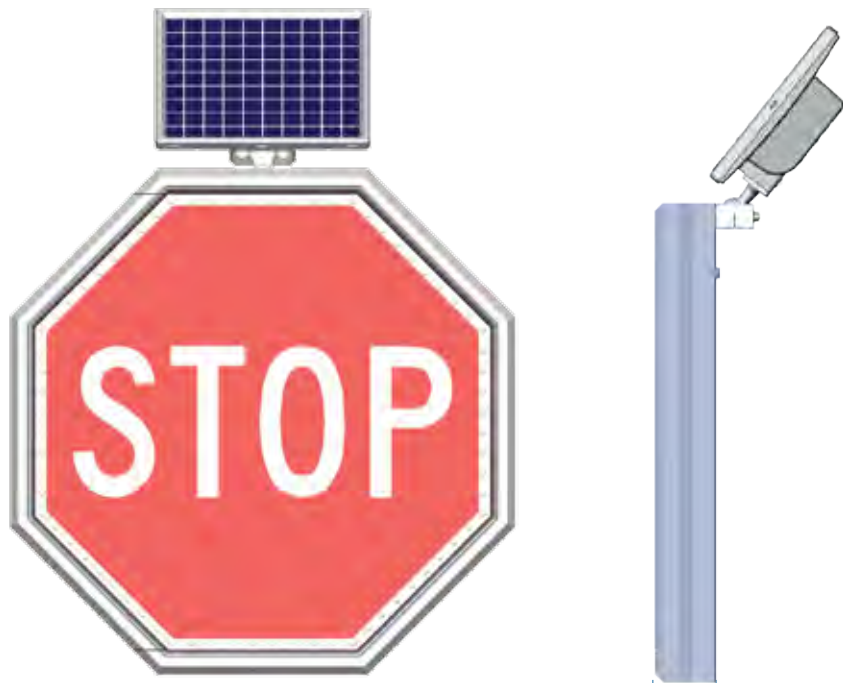

11700 EX 02

Item#	11700 EX 05	11700 EX 06	11700 EX 02	11700 EX 07	11700 EX 04
Dimensions (L x W)	30"x30"/ (762x762mm)				
Weight	39.4 lbs				
Material	PC + Aluminum frame				
Detailed description	Solar powered Multiply LEDs 6 Hour Solar Charge= 12 Hours of Operation ON/OFF switch Adjustable 360° / 45° solar panel Customized panel graphics, including colors, available on request				
ISO Compliant	DIN EN ISO 9001:2008				
Installation configuration	U-Channel Sign Posts 2"-2.5" / (50-70mm) posts				
Solar panel specifications	Type: Monocrystalline silicone seal Dimensions: 13.58"x11.53" / (345x293mm) Voltage: 220 V Current: 0.65 mA				
Battery specifications	Type: SLA Current /voltage: 7.0mA/h-12V				
LED specifications	Color: yellow / red Dimension: D 0.19" / (5mm) 90 flashes per minute Visibility distance: 1640' / (500m)				
Operating temperature range	-4°F to + 14°F				

Solar Powered Flashing LED Edge Lit Signs (Aluminum Frame)

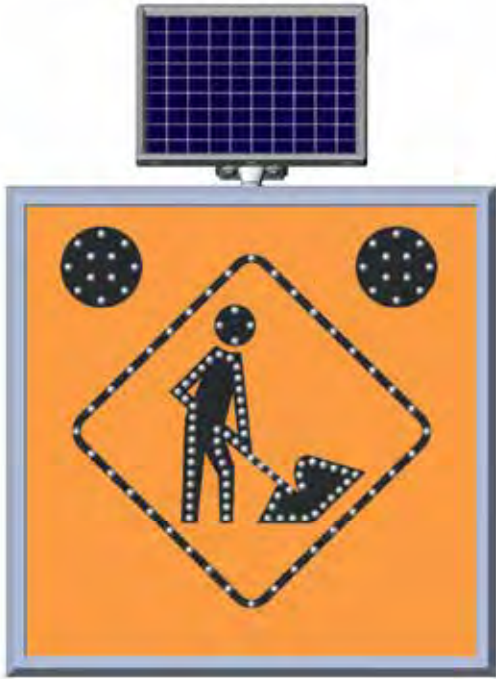

11700 EX 07



11700 EX 04




11700 EX 05



11700 EX 06





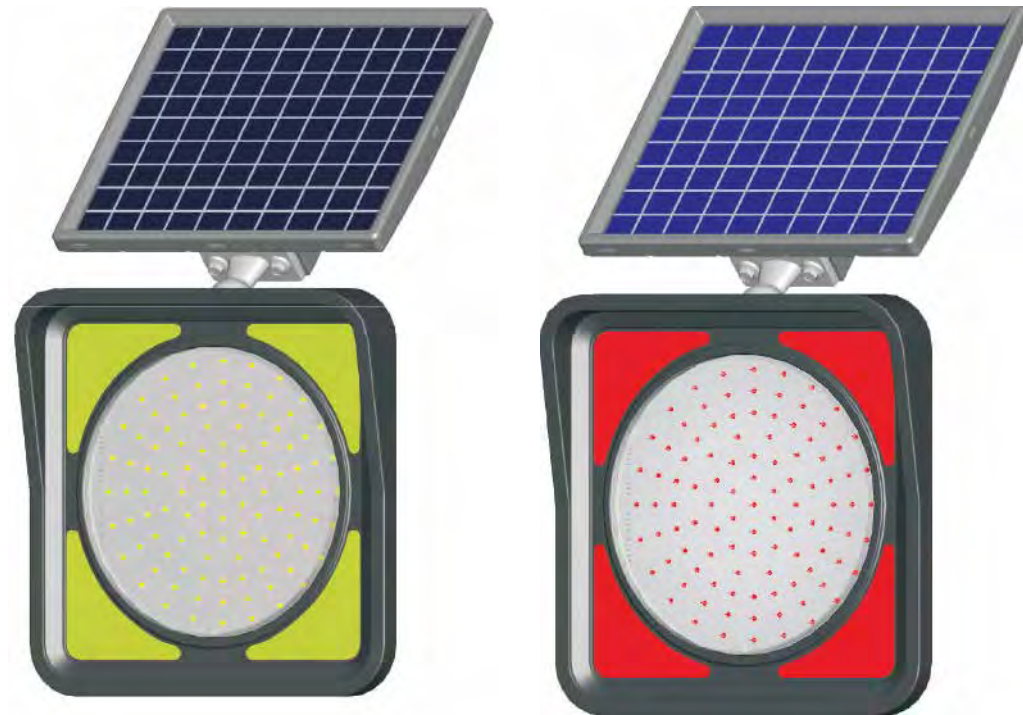

Solar Powered Flashing LED Edge Lit Signs




11850 FL S

11852 FL K

				
Item#	11850 FL S	11852 FL K	11860 FLS	11862 FLS
Dimensions (L x W)	15.74"X15.74" / (400x400mm)			
Weight	16.75 lbs			
Lens diameter	11.81" / (300mm)			
Material	PC			
Detailed description	Solar powered Multiply LEDs 6 Hour Solar Charge = 12 Hours of Operation ON/OFF switch Adjustable 360° / 45° solar panel Customized panel graphics, including colors, available on request			
ISO Compliant	DIN EN ISO 9001:2008			
Installation configuration	U-Channel Sign Posts 2"-2.5" / (50-70mm) posts			
Solar panel specifications	Type: Monocrystalline silicone seal Dimensions: 13.58"x11.53" / (345x293mm) Voltage: 220 V Current: 0.65 mA			
Battery specifications	Type: SLA Current /voltage: 7.0mA/h-12V			
LED specifications	Color: yellow / red Dimension: D 0.19" / (5mm) 90 flashes per minute Visibility distance: 1640' / (500m)			
Operating temperature range	-4°F to + 14°F			




Solar Powered Flashing LED Edge Lit Signs

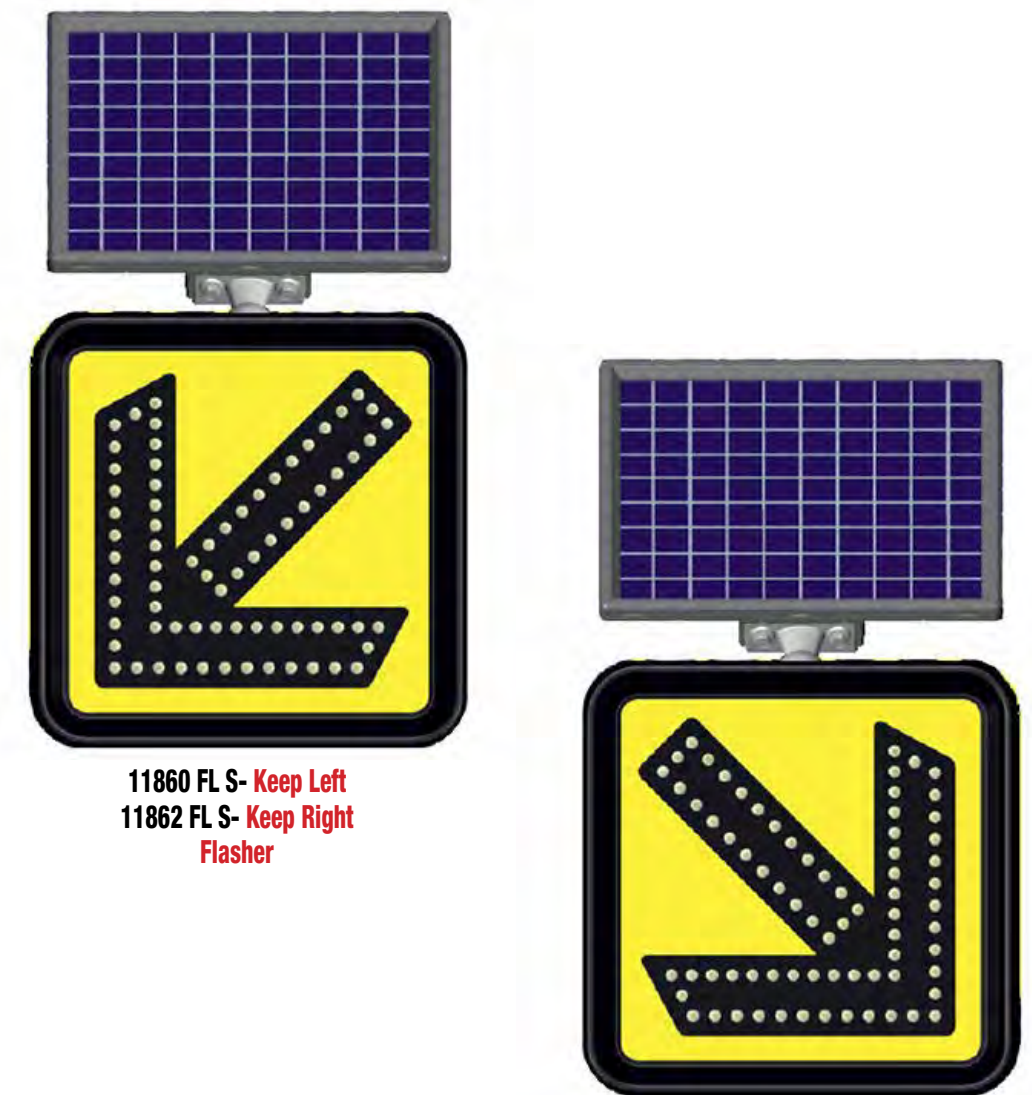

11860 FL S- Keep Left
11862 FL S- Keep Right
Flasher

11864 FL S- Keep Right
11866 FL S- Keep Left
Steady Light

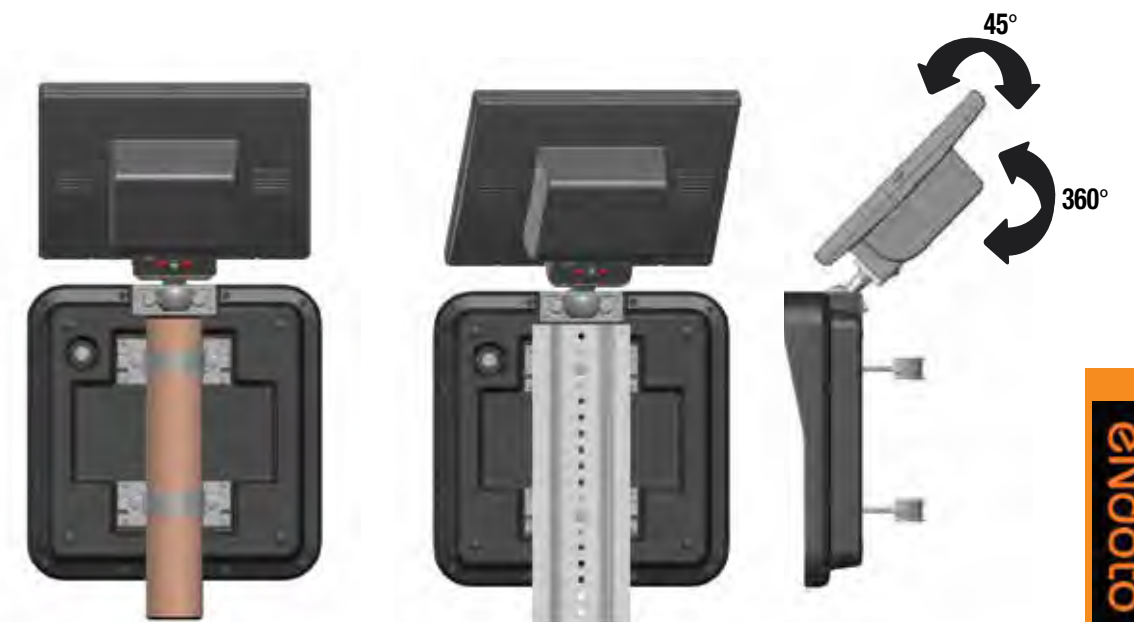







Solar Powered Flashing LED Edge Lit Signs

Customized panel graphics, including colors, available on request



11800-EX-01

						
Item#	11846 FL	11800-EX-02	11800-EX-01	11832 FL	11833 FL	11800-EX-03
Dimensions (L x W)	23.62"X23.62" / (600x600mm)					
Weight	21.49 lbs					
Material	PC					
Detailed description	Solar powered Multiply LEDs 6 Hour Solar Charge= 12 Hours of Operation ON/OFF switch Adjustable 360° / 45° solar panel Customized panel graphics, including colors, available on request					
ISO Compliant	DIN EN ISO 9001:2008					
Installation configuration	U-Channel Sign Posts 2"-2.5" / (50-70mm) posts					
Solar panel specifications	Type: Monocrystalline silicone seal Dimensions: 13.58"x11.53" / (345x293mm) Voltage: 220 V Current: 0.65 mA					
Battery specifications	Type: SLA Current /voltage: 7.0mA/h-12V					
LED specifications	Color: yellow / red Dimension: D 0.19" / (5mm) 90 flashes per minute Visibility distance: 1640' / (500m)					
Operating temperature range	-4°F to + 14°F					



11846 FL




11800-EX-02



11800-EX-03



11832 FL Keep Left

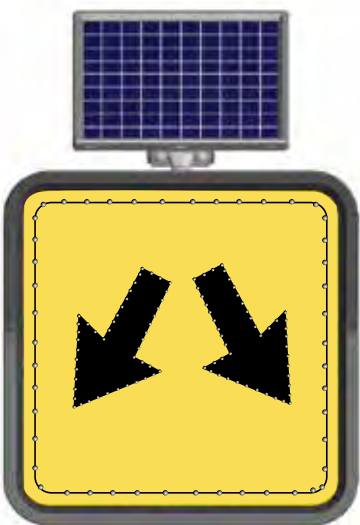







11833 FL

Solar Powered Flashing LED Edge Lit Signs

Customized panel graphics,
including colors, available
on request




11843 FL

						
Item#	11837 FL	11839 FL	11840 FL	11842 FL	11834 FL	11843 FL
Dimensions (L x W)	23.62"X23.62" / (600x600mm)					
Weight	21.49 lbs					
Material	PC					
Detailed description	Solar powered Multiply LEDs 6 Hour Solar Charge = 12 Hours of Operation ON/OFF switch Adjustable 360° / 45° solar panel Customized panel graphics, including colors, available on request					
ISO Compliant	DIN EN ISO 9001:2008					
Installation configuration	U-Channel Sign Posts 2"-2.5" / (50-70mm) posts					
Solar panel specifications	Type: Monocrystalline silicone seal Dimensions: 13.58"x11.53" / (345x293mm) Voltage: 220 V Current: 0.65 mA					
Battery specifications	Type: SLA Current /voltage: 7.0mA/h-12V					
LED specifications	Color: yellow / red Dimension: D 0.19" / (5mm) 90 flashes per minute Visibility distance: 1640' / (500m)					
Operating temperature range	-4°F to + 14°F					



11839 FL

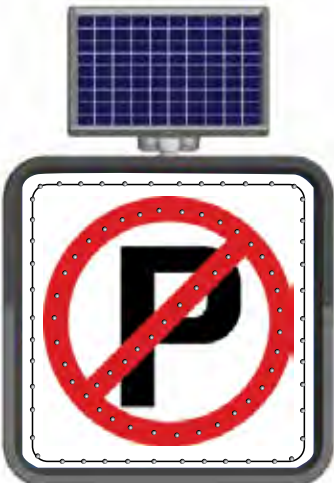

11840 FL



11842 FL



11837 FL









11843 FL

Solar Powered Flashing LED Edge Lit Signs

Customized panel graphics, including colors, available on request



11820 FL
The arrow can be switched to right / left

						
Item#	11826 FL	11828 FL	11822 FL	11824 FL	11830 FL	11820 FL
Dimensions (L x W)	23.62"X23.62" / (600x600mm)					
Weight	21.49 lbs					
Material	PC					
Detailed description	Solar powered Multiply LEDs 6 Hour Solar Charge = 12 Hours of Operation ON/OFF switch Adjustable 360° / 45° solar panel Customized panel graphics, including colors, available on request					
ISO Compliant	DIN EN ISO 9001:2008					
Installation configuration	U-Channel Sign Posts 2"-2.5" / (50-70mm) posts					
Solar panel specifications	Type: Monocrystalline silicone seal Dimensions: 13.58"x11.53" / (345x293mm) Voltage: 220 V Current: 0.65 mA					
Battery specifications	Type: SLA Current /voltage: 7.0mA/h-12V					
LED specifications	Color: yellow / red Dimension: D 0.19" / (5mm) 90 flashes per minute Visibility distance: 1640' / (500m)					
Operating temperature range	-4°F to + 14°F					



11826 FL



11828 FL



11830 FL



11822 FL



11824 FL

15.74"x15.74"- 110V Flashing LED Edge Lit Signs

Customized panel graphics, including colors, available on request



11880 FL A- Keep Right
11881 FL A- Keep Left
Steady Light






11887 FL A- Steady Light
11885 FL S- Flasher



11882 FL A- Keep Right
11883 FL A- Keep Left
Flasher



			
Item# Flasher	11885 FL A	11882 FL A	11883 FL A
Item# Steady Light	11887 FL A	11880 FL A	11881 FL A
Dimensions (L x W)	15.74"X15.74" / (400x400mm)		
Weight	7.27 lbs		
Lens diameter	11.81" / (300mm)		
Material	PC		
Detailed description	110V powered Multiply LEDs ON/OFF switch Customized panel graphics, including colors, available on request		
ISO Compliant	DIN EN ISO 9001:2008		
Installation configuration	U-Channel Sign Posts 2"-2.5" / (50-70mm) posts		
LED specifications	Color: yellow / red Dimension: D 0.19" / (5mm) 90 flashes per minute Visibility distance: 1640' / (500m)		
Operating temperature range	-4°F to + 14°F		

23.62"x23.62"- 110V Flashing LED Edge Lit Signs



11886 FL A







11800 EX A 03




11884 FL A
The arrow can be switched to right / left



11888 FL A- Keep Right
11889 FL A- Keep Left

				
Item# Flasher	11884 FL A	11888 FL A	11800 EX A 03	11886 FL A
Dimensions (L x W)	23.62"X23.62" / (600x600mm)			
Weight	12.12 lbs			
Material	PC			
Detailed description	110V powered Multiply LEDs ON/OFF switch Customized panel graphics, including colors, available on request			
ISO Compliant	DIN EN ISO 9001:2008			
Installation configuration	U-Channel Sign Posts 2"-2.5" / (50-70mm) posts			
LED specifications	Color: yellow / red Dimension: D 0.19" / (5mm) 90 flashes per minute Visibility distance: 1640' / (500m)			
Operating temperature range	-4°F to + 14°F			

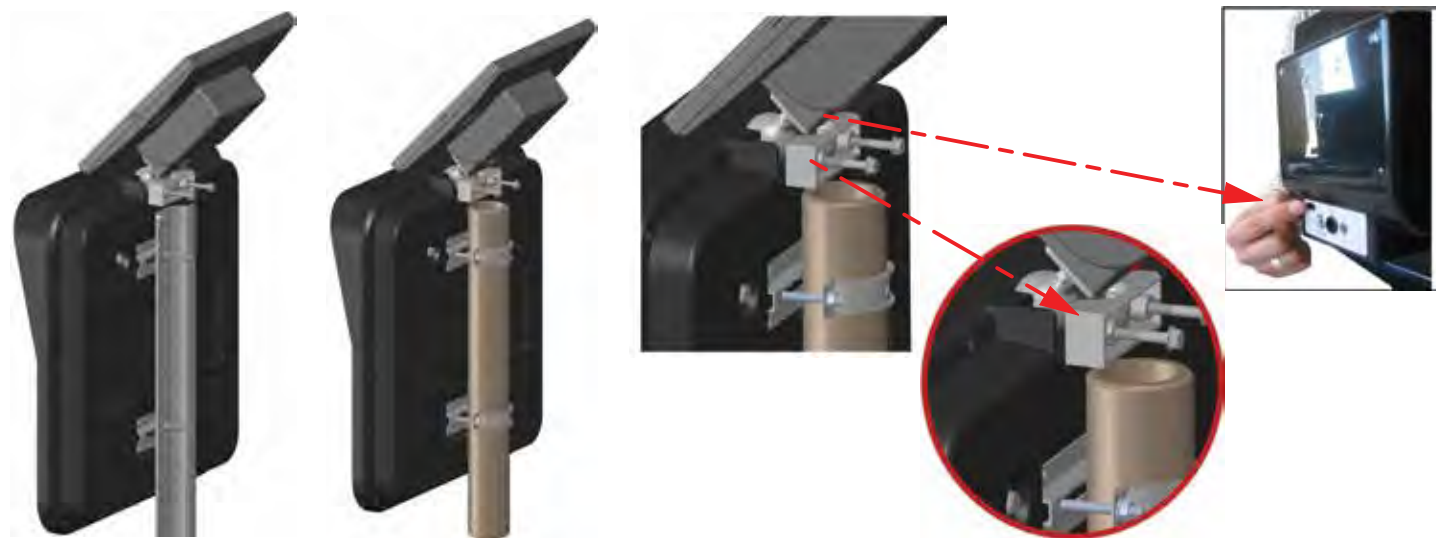

- The LED sign can be attached to U Channel posts as well as 2"-2.5" / (50-75mm) post.
- The solar panel can be swiveled 360° or tilted 45°.
- The LED sign has an on/off switch as well as a light sensor which starts to work during dark hours.



126A



194A

126A	Cone Adaptor
194 A	Delineator Adaptor



On/off switch



Can be attached to cone adaptor



Can be attached to Delineator Marker Posts and Traffic Channelizer Posts



Built in solar panel



Can be attached to Delineator adaptors




Can be attached to Barricades and Barriers








Speed Bumps, Mini Humps, Road Markers and Cables Protector

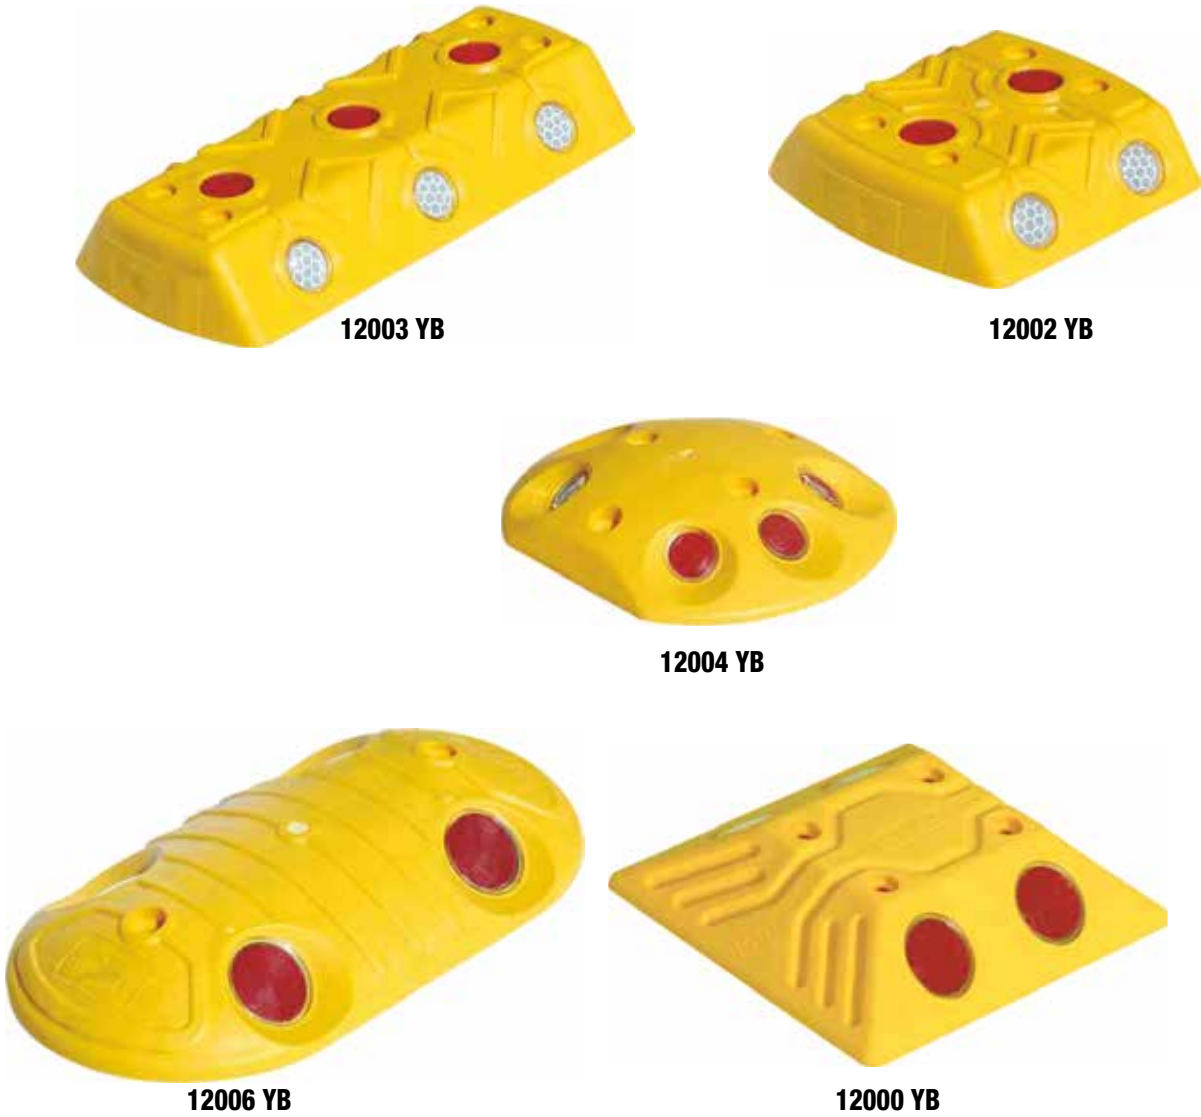



- Effective speed restrictive height size: 1.57" - 1.96" vs. 6 to 31 mph.
- Made from PVC compound and PPC polymer.
- Strong resistances to warping and embedding in asphalt due to vehicle impacts. High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture.
- Rounded edges to prevent damage to vehicle tires and components.
- Different speed restriction is designed with different warning features.
- Available in yellow and black colors.
- Efficient and continuous warning with yellow retro-reflective tape, cat eyes and retro-reflective lenses.
- Better visibility during daytime and night.
- Mainly applied on streets where speed must be restricted, especially schools and restricted crossings, junctions, shopping malls, hospital exits, blind spots, pedestrian zones, etc.
- Operating temperature range -4° F to + 14°F

Road Markers



					
Item#	12006 YB	12004 YB	12003 YB	12000 YB	12002 YB
Dimensions (L x W x H)	4.72"x8.66"x1.10" (120x220x28mm)	4.72"x5.51"x0.98" (120x140x25mm)	3.93"x6.66"x1.25" (100x220x32mm)	4.92"x5.9"x1.25" (125x150x32mm)	4.72"x4.72"x1.10" (120x120x28mm)
Weight	0.48 lbs	0.26 lbs	0.52 lbs	0.41 lbs	0.37 lbs
Material	PPC				
Detailed description	Bi-directional Red/White reflective lenses for high visibility Fast and easy installation on any paved surface High durability, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture				
Reflective Visibility	2+2 Reflective lenses	3+3 Reflective lenses	3+3+3 Reflective lenses	2+2 Reflective lenses	2+2+2 Reflective lenses
ISO Compliant	DIN EN ISO 9001:2008				
Installation Configuration	D 0.55" x L 2.75" x D 0.31" screw (D 14mm x L 70mm x D 8mm screw)	D 0.23"x L 4.13" spike (D 6mm x L 105mm)			





				
Item#	12011 YB	12007 YB	12009 YB	12005-1 YB
Dimensions (L x W x H)	3.93"x3.93"x0.82" (100x100x21mm)	4.72"x4.72"x1.1" (120x120x28mm)	3.93"x3.93"x0.82" (100x100x21mm)	4.13"x4.13"x0.78" (105x105x20mm)
Weight	0.82 lbs	0.63 lbs	0.33 lbs	0.24 lbs
Material	Aluminum		ABS	
Detailed description	Bi-directional Red/White reflective lenses or cat eyes for high visibility Fast and easy installation on any paved surface High durability, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture			
Reflective Visibility	3+3 cat eyes	2+2 cat eyes	3+3 cat eyes	1+1 Reflective lenses
ISO Compliant	DIN EN ISO 9001:2008			
Installation Configuration	D 0.78"x L 1.96" (D 20mm x L 50mm) Aluminum spike	D 0.55"x L 2.75" x D 0.31" screw (D 14mm x L 70mm x D 8mm screw)		D 0.23"x L 4.13" spike (D 6mm x L 105mm)




Item#	Detailed description	Dimensions
159 A	Evelux plastic anchors, and metal screw kit for speed bumps	D 0.70"x L 3.54" (D 18mm x L 90mm)
160 A	Evelux plastic anchors, and metal screw kit for road markers	D 0.55" x L 2.75" x D 0.31" screw (D 14mm x L 70mm x D 8mm screw)
161 A	Spike for road markers	D 0.23" x L 4.13" spike (D 6mm x L 105mm)



PVC Compound Mini Humps with Reflective Tapes



		
Item#	12108 YK	12109 YK K
Dimensions (L x W x H)	23.62"x19.68"x1.77" (600x500x45mm)	23.62"x11.81"x1.77" (600x300x45mm)
Weight	20.55 lbs	7.49 lbs
Material	PVC compound	
Detailed description	Bi-directional Yellow reflective tape for High visibility Modular design expands to any road width Fast and easy installation on any paved surface Can be removed , stored and reinstalled Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture	
ISO Compliant	DIN EN ISO 9001:2008	
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit	

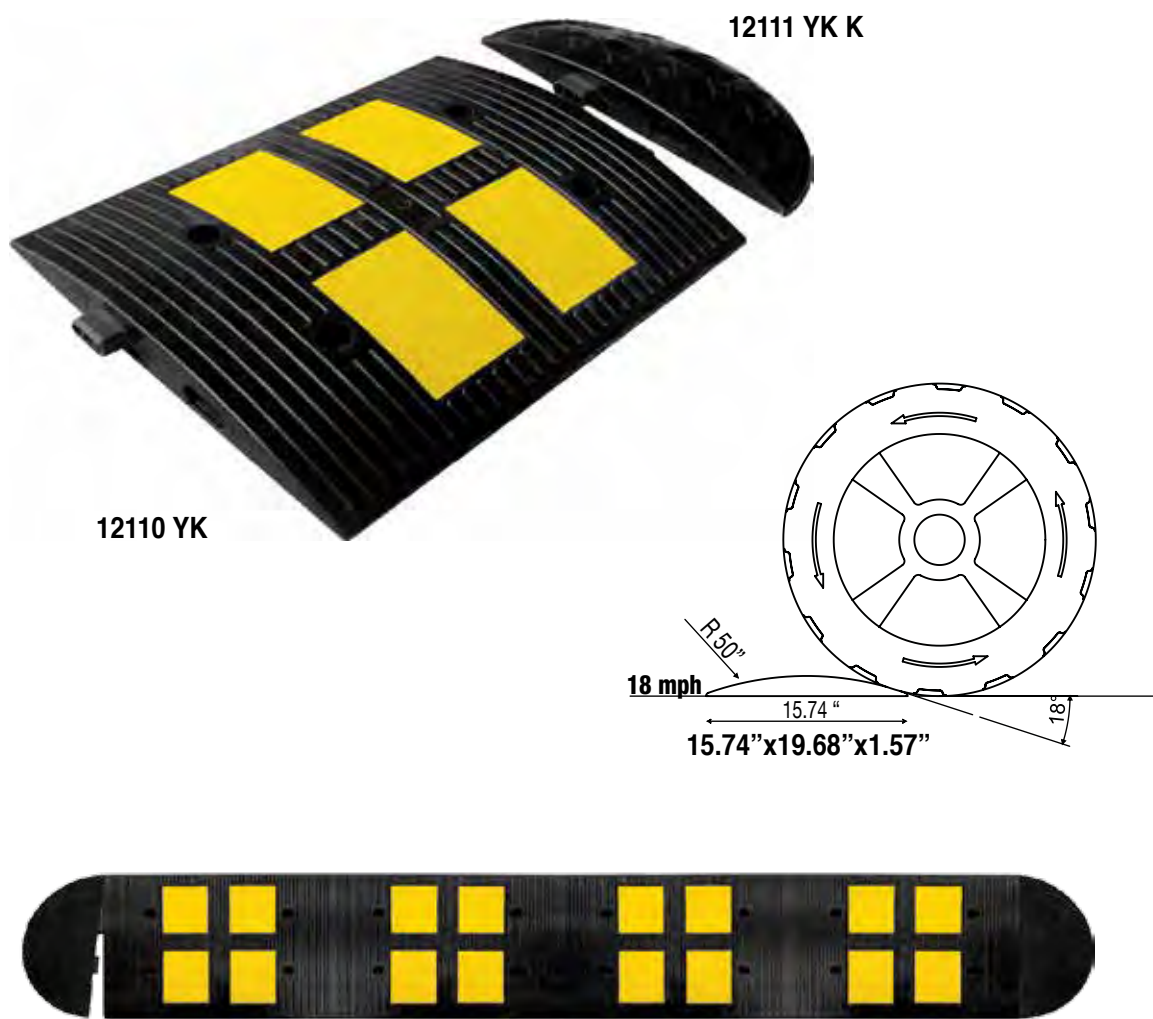
PVC Compound Mini Humps with Reflective Tapes





		
Item#	12110 YK	12111 YK K
Dimensions (L x W x H)	15.74"x19.68"x1.57" (400X500X40mm)	15.74"x7.87"x1.57" (400X200X40mm)
Weight	14.15 lbs	3.63 lbs
Material	PVC compound	
Detailed description	Bi-directional Yellow reflective tape for High visibility Modular design expands to any road width Fast and easy installation on any paved surface Can be removed , stored and reinstalled Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture	
ISO Compliant	DIN EN ISO 9001:2008	
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit	

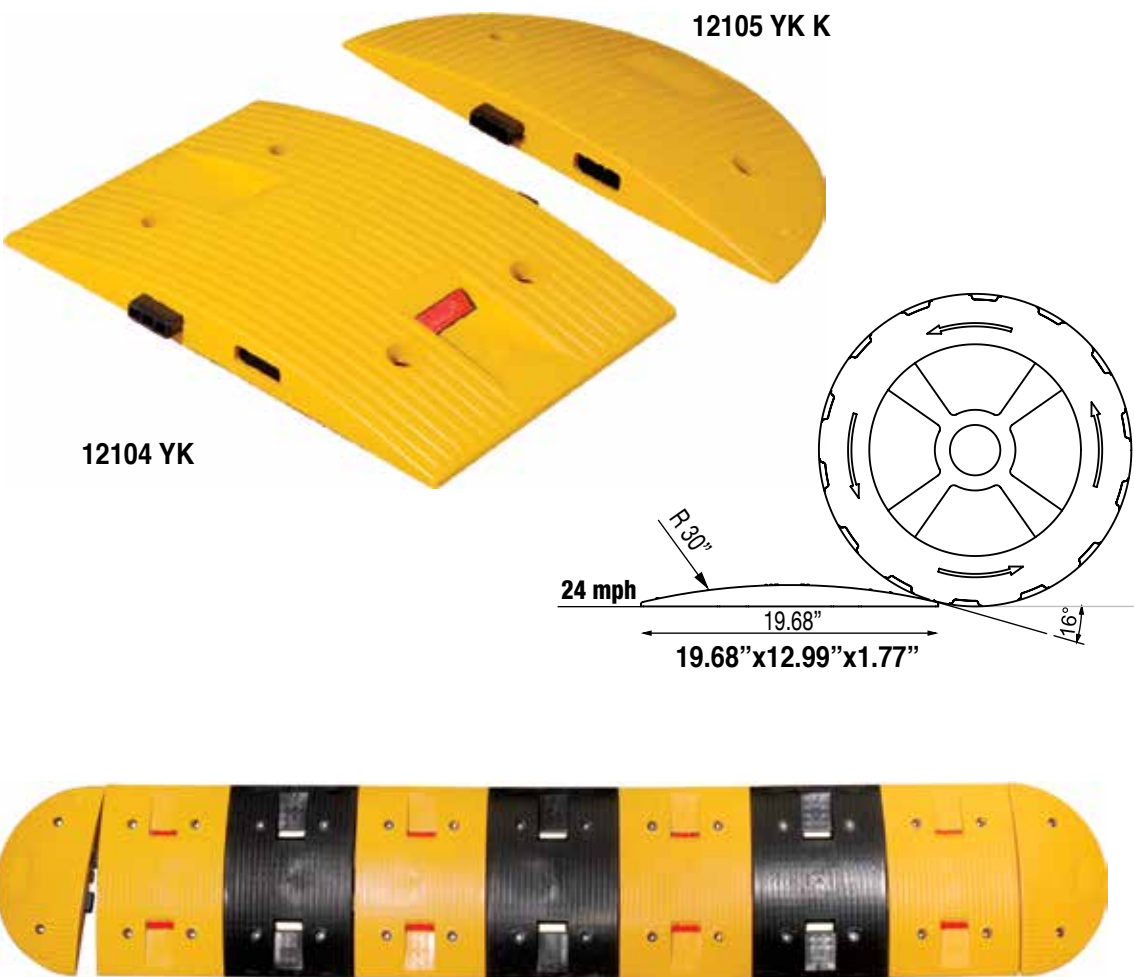


PVC Compound Mini Humps with Reflective Lenses





		
Item#	12104 YK	12105 YK K
Dimensions (L x W x H)	19.68"x12.99"x1.77" (500x330x45mm)	19.68"x9.84"x1.77" (500X250X45mm)
Weight	13.78 lbs	6.61 lbs
Material	PVC compound	
Detailed description	Bi-directional red & white reflective lenses for High visibility Modular design expands to any road width Fast and easy installation on any paved surface Can be removed, stored and reinstalled Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture	
ISO Compliant	DIN EN ISO 9001:2008	
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit	




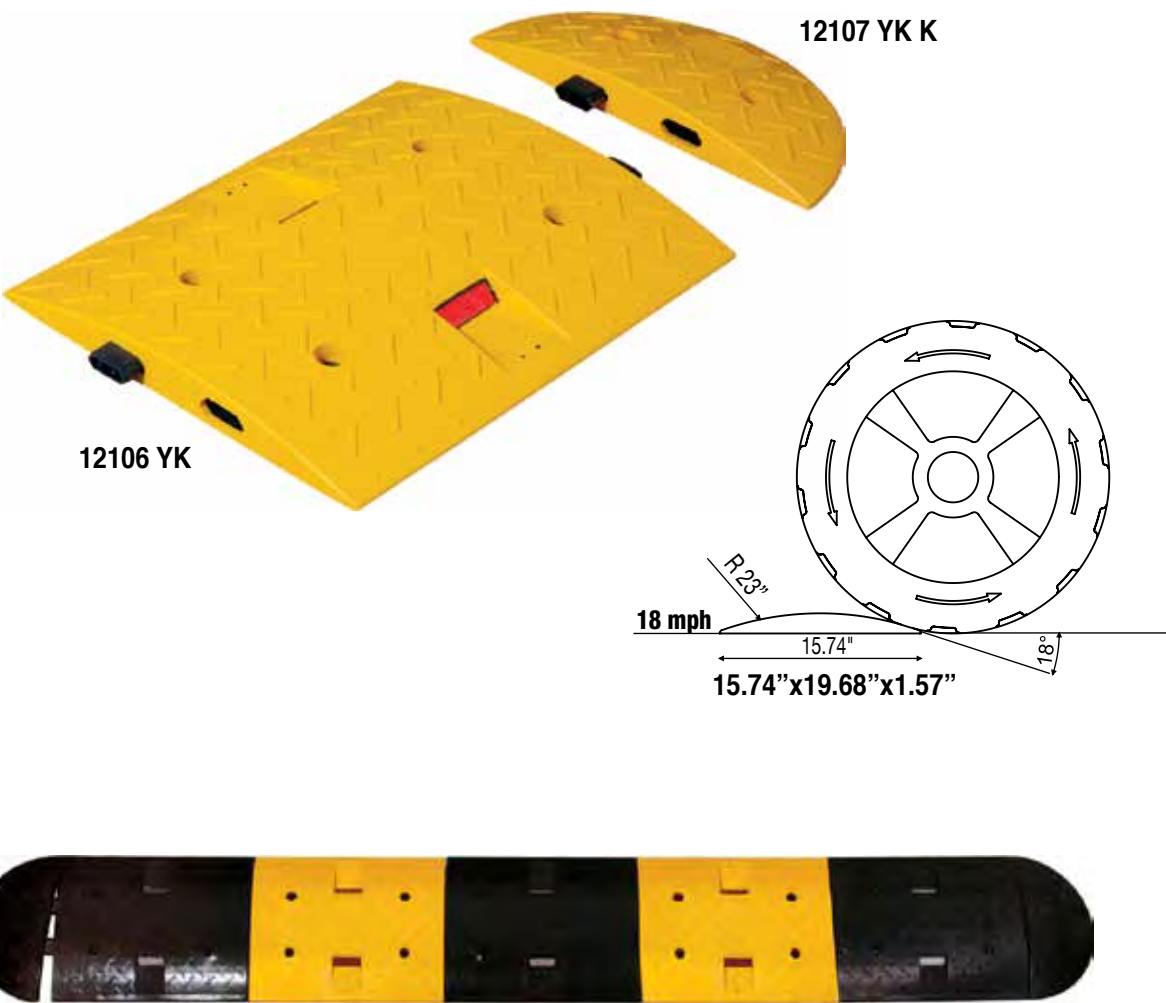

PVC Compound Mini Humps with Reflective Lenses




		
Item#	12106 YK	12107 YK K
Dimensions (L x W x H)	15.74"x19.68"x1.57" (400x500x40mm)	15.74"x7.87"x1.57" (400x200x40mm)
Weight	14.33 lbs	3.63 lbs
Material	PVC compound	
Detailed description	Bi-directional red & white reflective lenses for High visibility Modular design expands to any road width Fast and easy installation on any paved surface Can be removed, stored and reinstalled Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture	
ISO Compliant	DIN EN ISO 9001:2008	
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit	

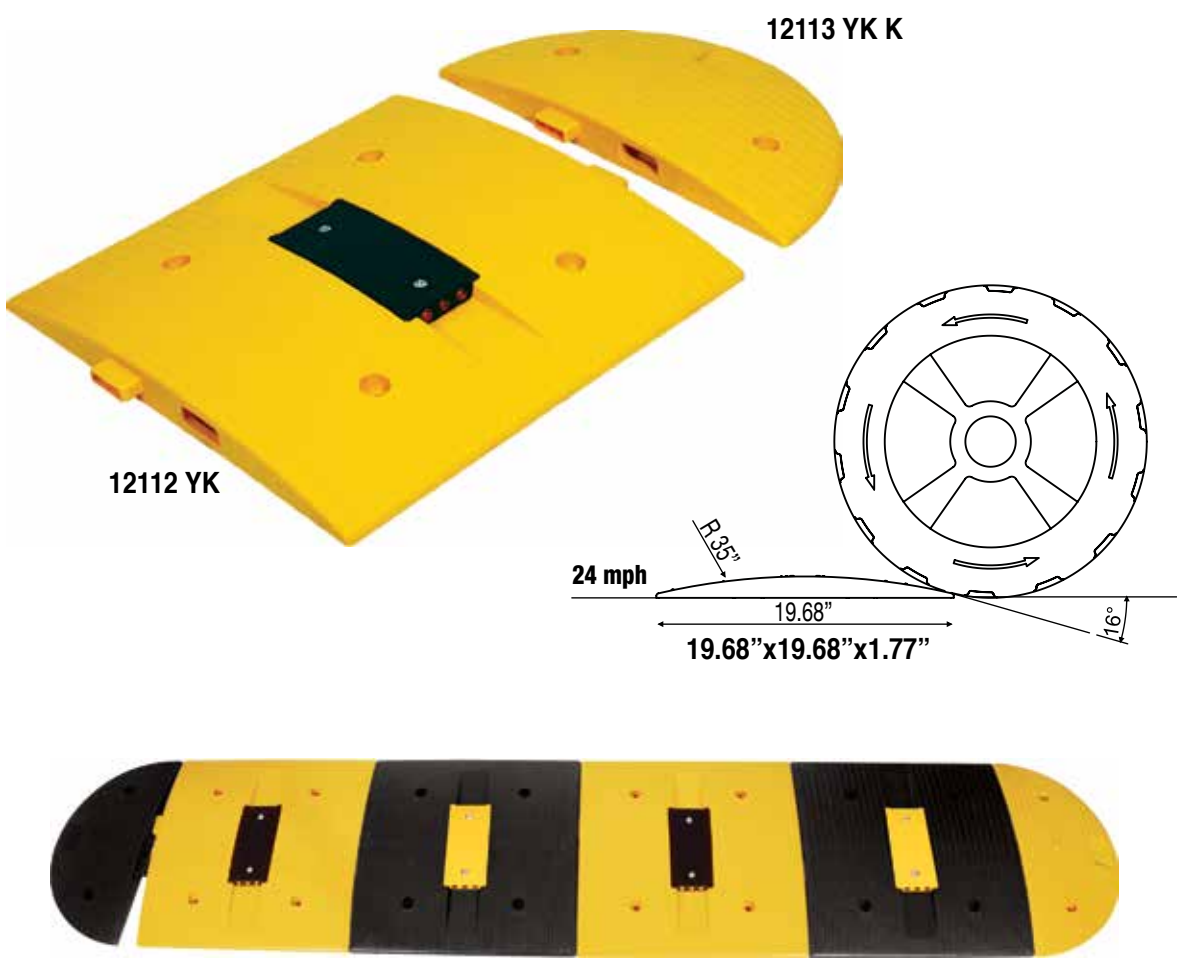



Plastic (PPC) Mini Humps with Cat-Eyes

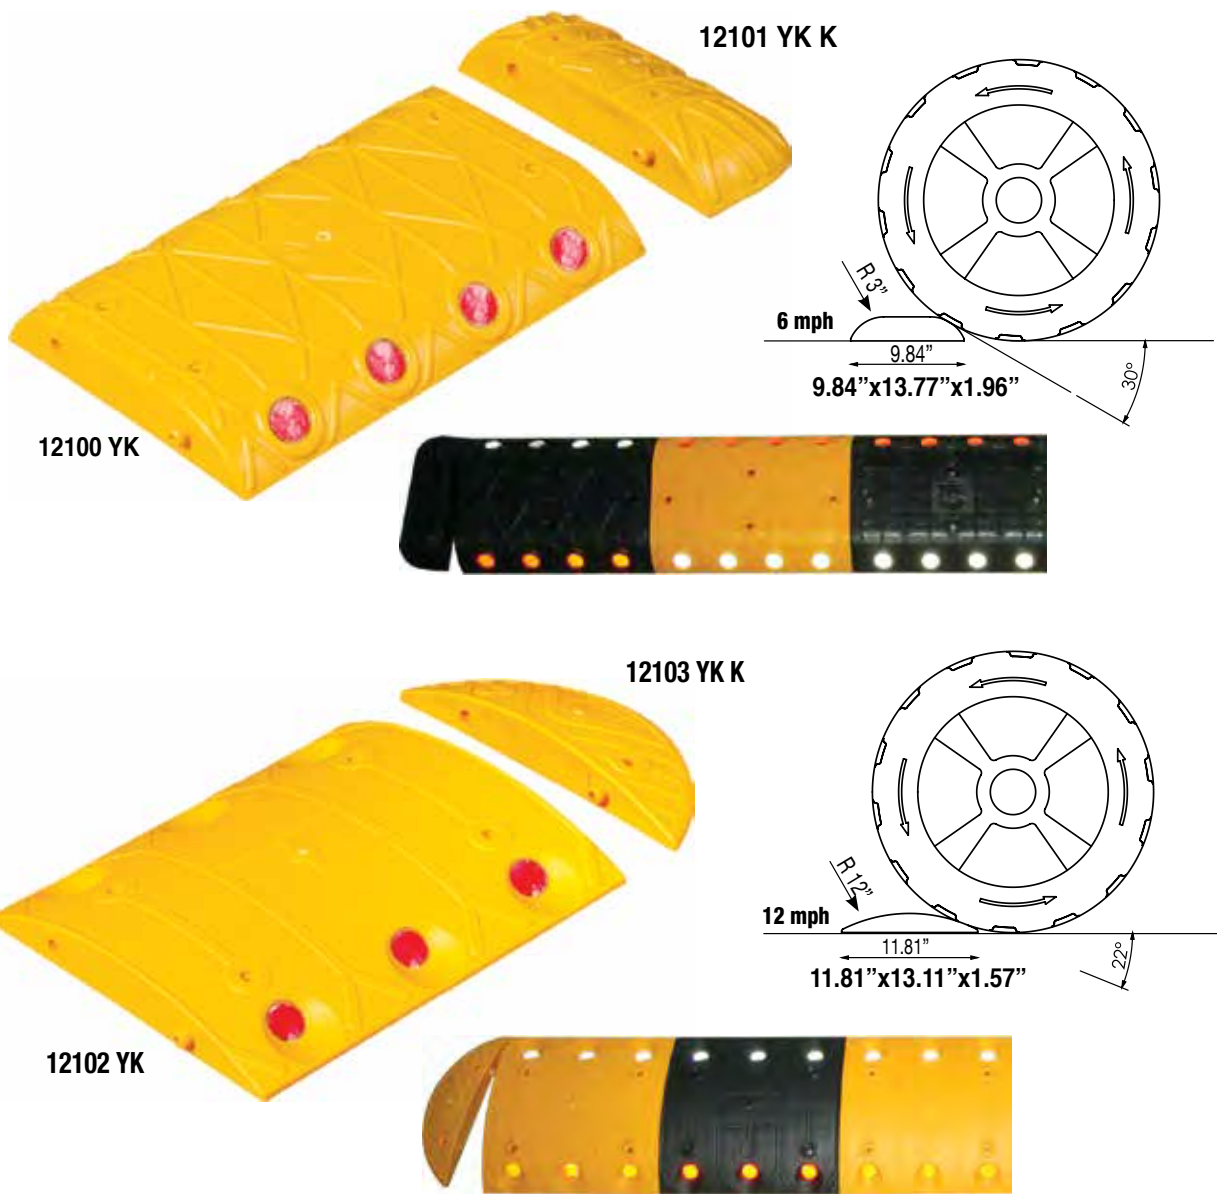

		
Item#	12112 YK	12113 YK K
Dimensions (L x W x H)	19.68"x19.68"x1.77" (500x500x45mm)	19.68"x9.84"x1.77" (500x250x45mm)
Weight	6.90 lbs	2.42 lbs
Material	PPC	
Detailed description	Bi-directional reflective red cat-eyes (3+3) for High visibility Modular design expands to any road width Fast and easy installation on any paved surface Can be removed stored and reinstall Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture	
ISO Compliant	DIN EN ISO 9001:2008	
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit	


Plastic (PPC) mini humps with reflective lenses



				
Item#	12100 YK	12101 YK K	12102 YK	12103 YK K
Dimensions (L x W x H)	9.84"x13.77"x1.96" (250x350x50mm)	9.84"x3.93"x1.96" (250x100x50mm)	11.81"x13.11"x1.57" (300x333x40mm)	11.81"x3.93"x1.57" (300x100x40mm)
Weight	3.30 lbs	0.79 lbs	2.93 lbs	0.55 lbs
Material	PPC			
Detailed description	Bi-directional reflective red & white lenses for high visibility Modular design expands to any road width Fast and easy installation on any paved surface Can be removed stored and reinstall Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture			
ISO Compliant	DIN EN ISO 9001:2008			
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit			





Cables Protector

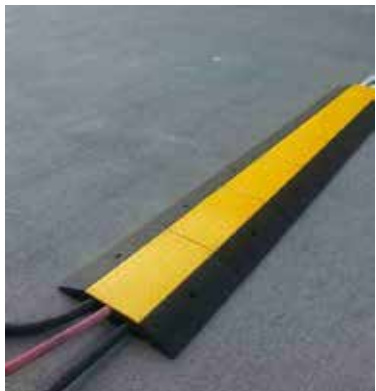

12298 UB



	
Item#	12298 UB
Dimensions (L x W x H)	23.68"x19.68"x2.95" (600x500x75mm)
Weight	19.27 lbs
Material	PPC
Detailed description	3 Channels 1.96"x1.96" Modular design expands to any road width Fast and easy installation on any paved surface Can be removed stored and reinstall Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture
ISO Compliant	DIN EN ISO 9001:2008
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit

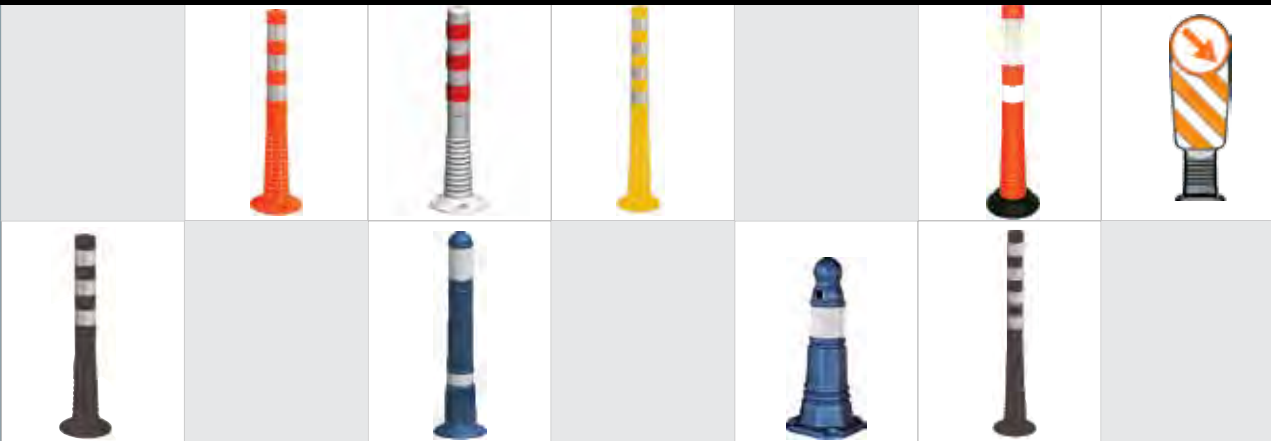

Polyurethane Flexible Delineator Posts and Permanent Bollards


- Customized panel graphics, including colors, available on request.
- Delineator posts are designed with a reactive spring design and made from flexible Polyurethane to give with impact and rebound towards traffic.
- Warning effect can be enhanced by attaching barricade flashers and sign boards on top of posts.
- Permanent Bollards designed to prevent vehicles from parking in restricted areas.
- Permanent Bollards made from durable materials have a visual effect with esthetic appearance, reflective sheeting and different colors.
- When Flexible Delineator Posts and Permanent Bollards are damaged, they can be exchanged easily.
- Easily fixed on to the ground with epoxy gluing or screwing.
- Operating temperature range -40F to + 140F






Surface Mount Polyurethane Flexible Delineator




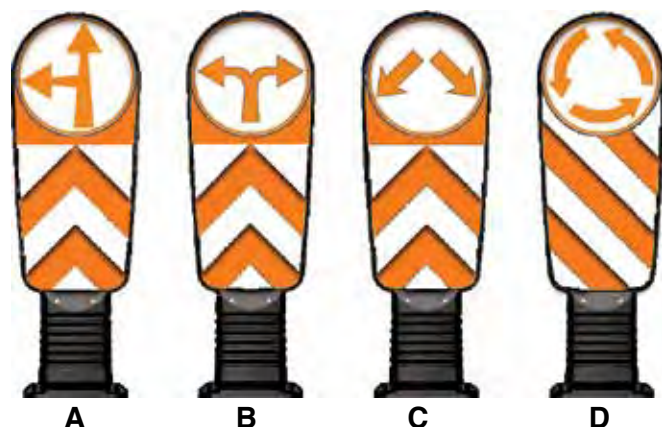



Customized panel graphics, including colors, available on request

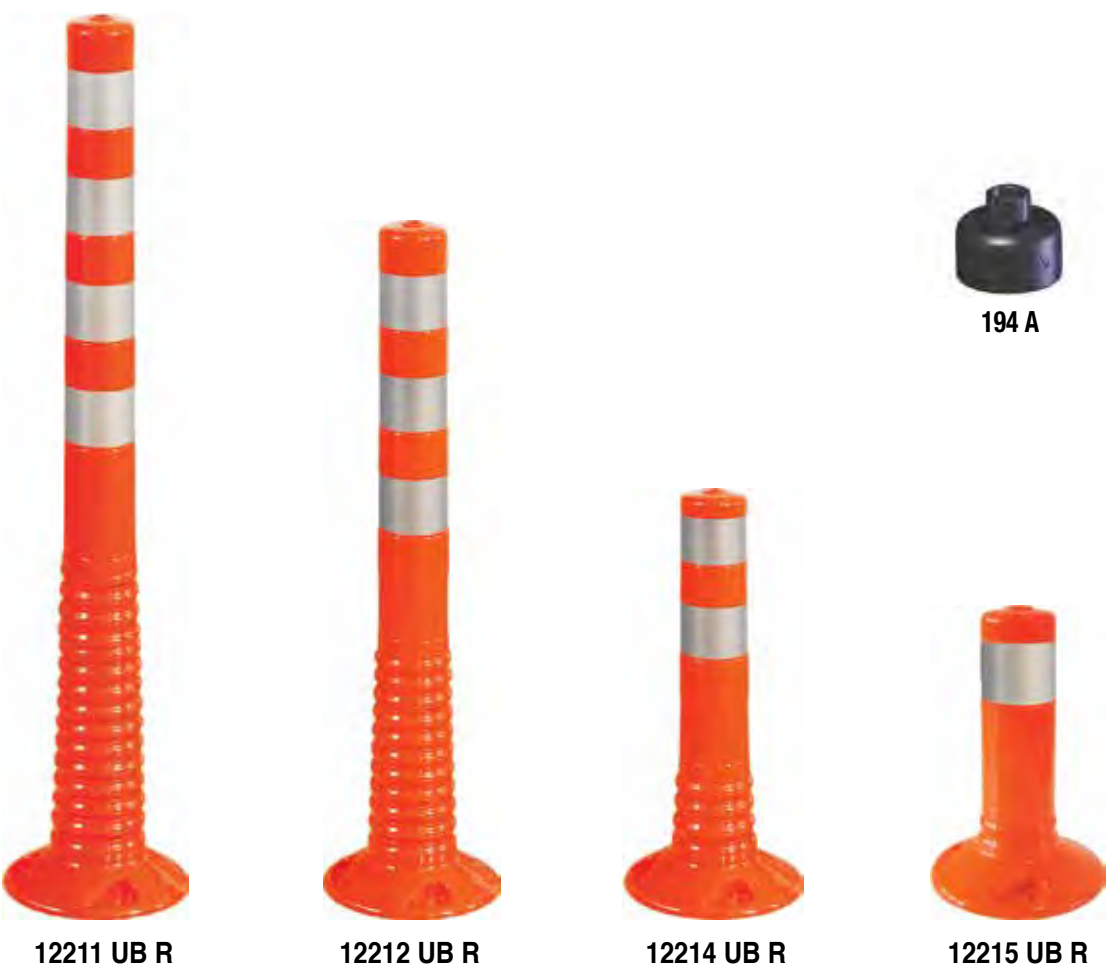

			
Item#	12250 UB R	12254 UB R	12252 UB R
Dimensions (L x H)	11.81"x39.37" (300x1000mm)	7.84"x35.43" (200x900mm)	11.81"x39.37" (300x1000mm)
Weight	6.83 lbs	3.74 lbs	6.83 lbs
Material	TPU Polyurethane		
Detailed description	Reflective sheeting for high visibility. Unbreakable flexible spring design Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Fast and easy installation on any paved surface Customized panel graphics, including colors, available on request		
ISO Compliant	DIN EN ISO 9001:2008		
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit		


Surface Mount Polyurethane Flexible Delineator Posts







				
Item#	12211 UB R	12212 UB R	12214 UB R	12215 UB R
Dimensions (D x H)	3.14"x39.37" (80x1000mm)	3.14"x29.52" (80x750mm)	3.14"x17.71" (80x450mm)	3.14"x11.81" (80x300mm)
Weight	3.52 lbs	2.64 lbs	2.16 lbs	1.58 lbs
Material	TPU polyurethane			
Detailed description	Flexible reflective sheeting for high visibility Unbreakable flexible spring design Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Fast and easy installation on any paved surface Barricade flashers, sign boards and accessories can be attached to Evelux Delineator adaptor			
ISO Compliant	DIN EN ISO 9001:2008			
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit			

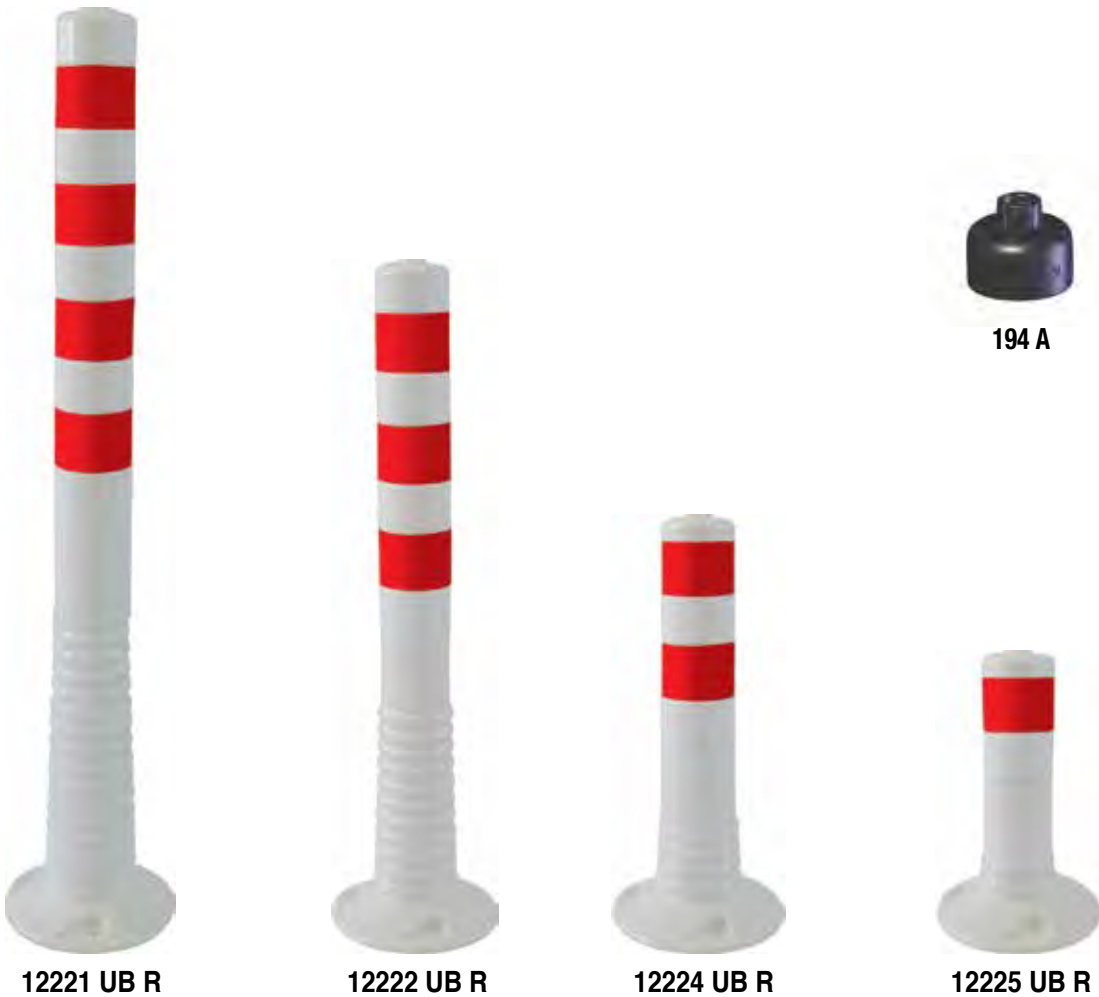


Surface Mount Polyurethane Flexible Delineator Posts







				
Item#	12221 UB R	12222 UB R	12224 UB R	12225 UB R
Dimensions (D x H)	3.14"x39.37" (80x1000mm)	3.14"x29.52" (80x750mm)	3.14"x17.71" (80x450mm)	3.14"x11.81" (80x300mm)
Weight	3.52 lbs	2.64 lbs	2.16 lbs	1.58 lbs
Material	TPU polyurethane			
Detailed description	Flexible reflective sheeting for high visibility Unbreakable flexible spring design Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Fast and easy installation on any paved surface Barricade flashers, sign boards and accessories can be attached to Evelux Delineator adaptor			
ISO Compliant	DIN EN ISO 9001:2008			
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit			

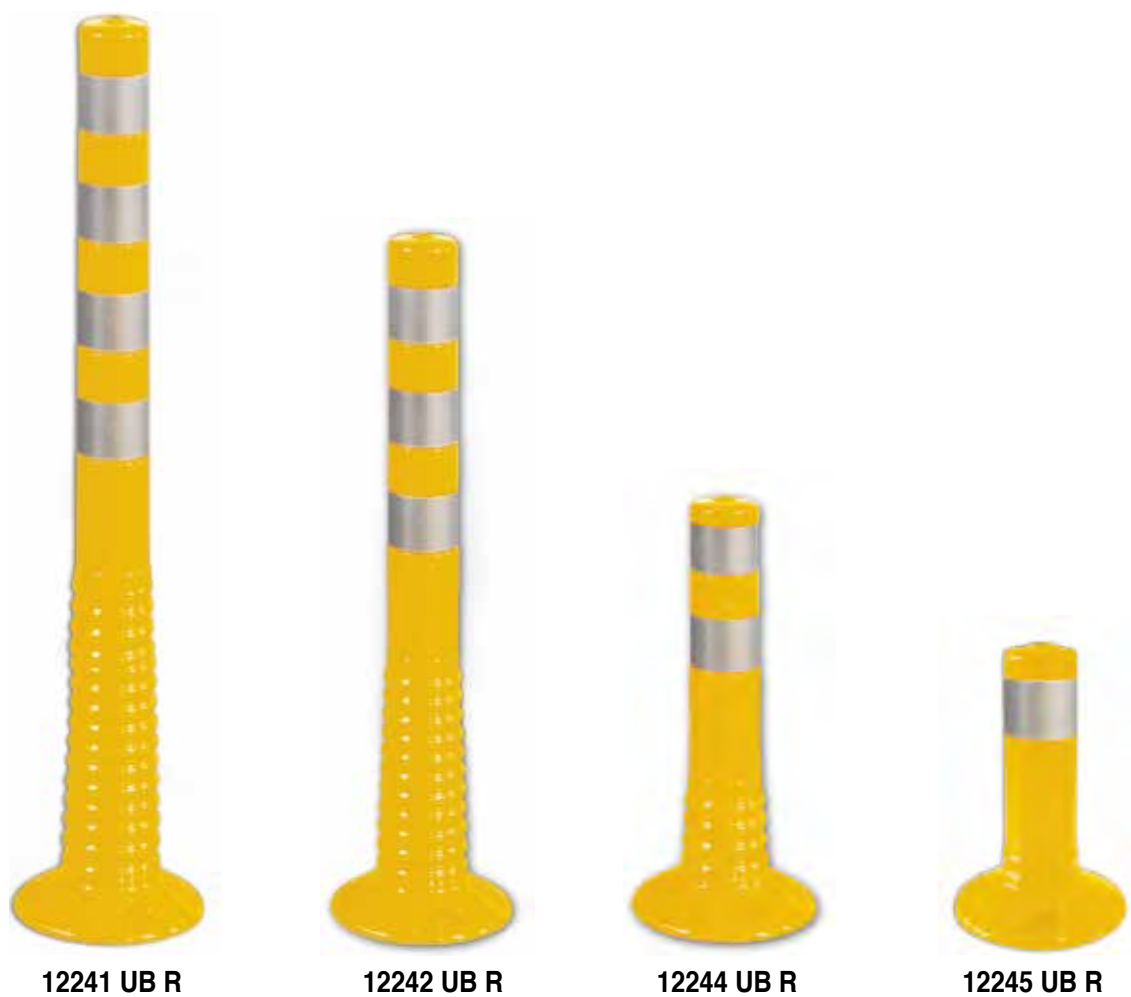


Surface Mount Polyurethane Flexible Delineator Posts



				
Item#	12241 UB R	12242 UB R	12244 UB R	12245 UB R
Dimensions (D x H)	3.14"x39.37" (80x1000mm)	3.14"x29.52" (80x750mm)	3.14"x17.71" (80x450mm)	3.14"x11.81" (80x300mm)
Weight	3.52 lbs	2.64 lbs	2.16 lbs	1.58 lbs
Material	TPU polyurethane			
Detailed description	Flexible reflective sheeting for high visibility Unbreakable flexible spring design Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Fast and easy installation on any paved surface Barricade flashers, sign boards and accessories can be attached to Evelux Delineator adaptor			
ISO Compliant	DIN EN ISO 9001:2008			
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit			




Surface Mount Polyurethane Flexible Delineator Posts

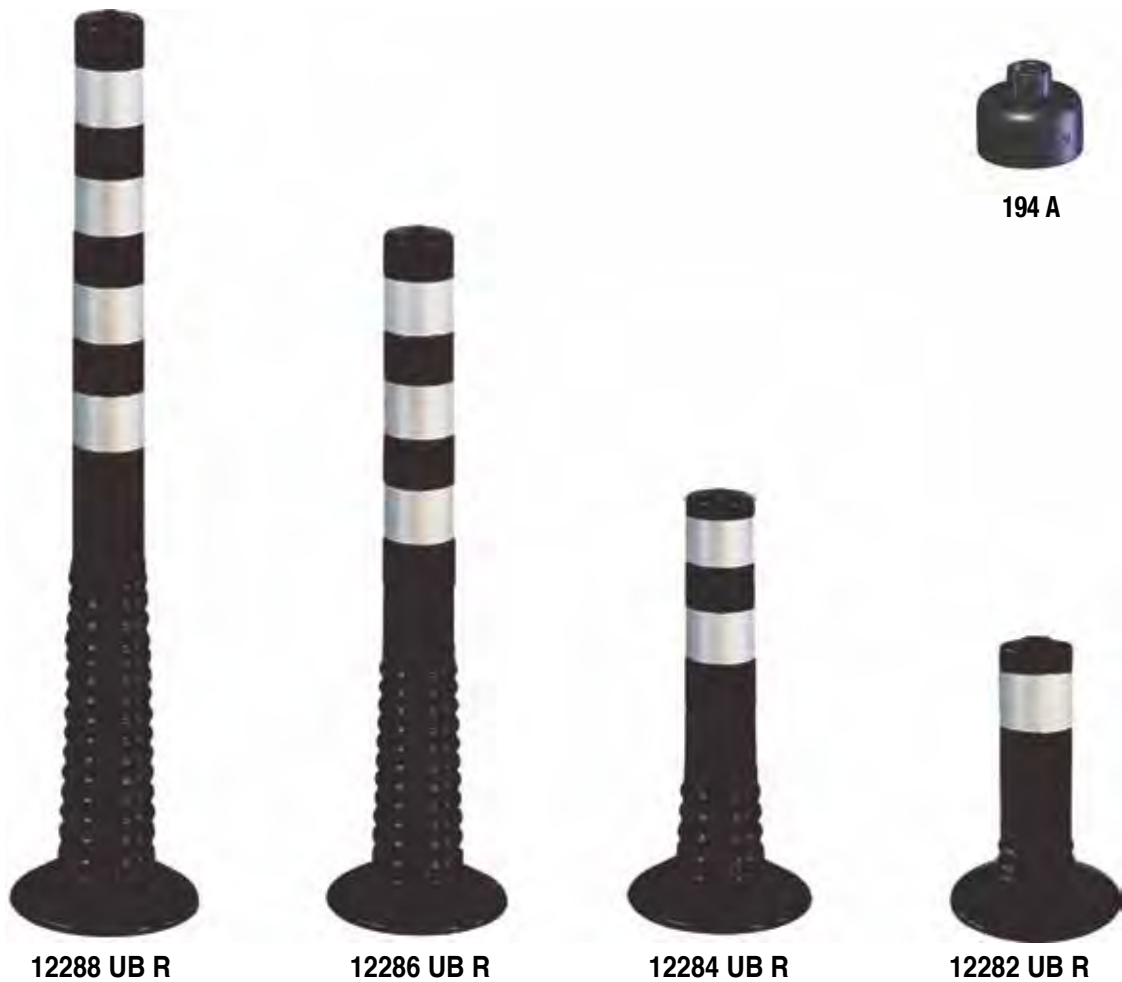

Item#	12288 UB R	12286 UB R	12284 UB R	12282 UB R
Dimensions (D x H)	3.14"x39.37" (80x1000mm)	3.14"x29.52" (80x750mm)	3.14"x17.71" (80x450mm)	3.14"x11.81" (80x300mm)
Weight	3.52 lbs	2.64 lbs	2.16 lbs	1.58 lbs
Material	TPU polyurethane			
Detailed description	Flexible reflective sheeting for high visibility Unbreakable flexible spring design Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Fast and easy installation on any paved surface Barricade flashers, sign boards and accessories can be attached to Evelux Delineator adaptor			
ISO Compliant	DIN EN ISO 9001:2008			
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit			



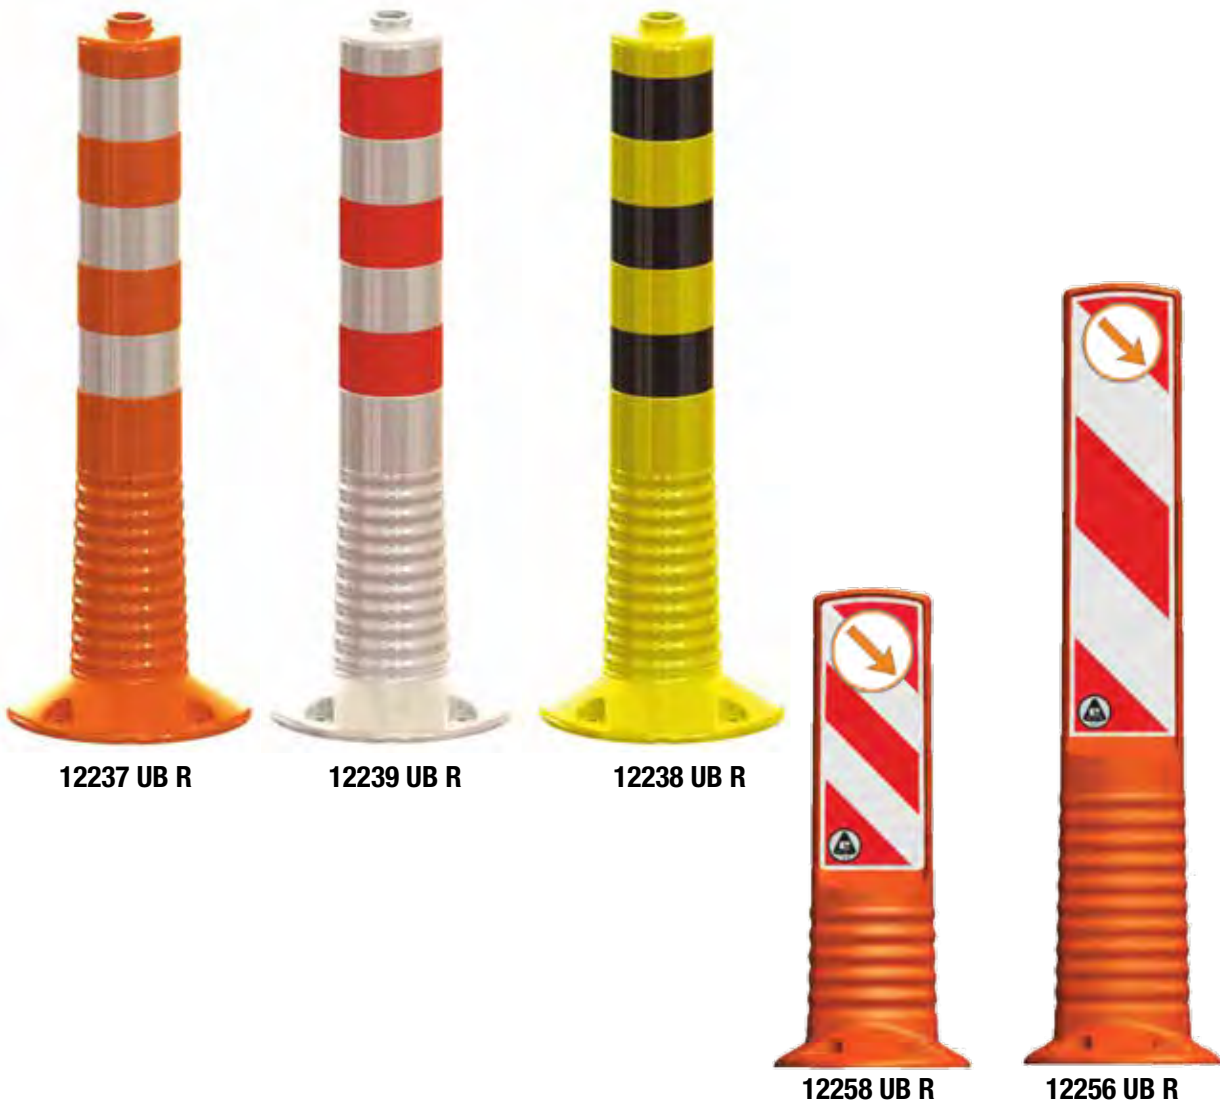

Large Surface Mount Polyurethane Flexible Delineator Posts



Item#	12237 UB R	12239 UB R	12238 UB R	12258 UB R	12256 UB R
Dimensions (D x H)	4.33"x29.52" / (110x750mm)			3.93"x19.68" (100x500mm)	3.93"x31.49" (100x800mm)
Weight	4.62 lbs			2.16 lbs	3.08 lbs
Material	TPU polyurethane				
Detailed description	Flexible reflective sheeting for high visibility Unbroken flexible spring design Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Fast and easy installation on any paved surface Barricade flashers, sign boards and accessories can be attached to Evelux Large Delineator adaptor				
ISO Compliant	DIN EN ISO 9001:2008				
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit				


Permanently glue mounted base kit with removable Polyurethane Flexible Delineator Posts



		
Item#	12232 UB R	12232 UB R
Dimensions (D x H)	3.14"x17.71" (80x450mm)	3.14"x29.52" (80x750mm)
Weight	2.42 lbs	3.26 lbs
Material	TPU Polyurethane post - ABS base	
Detailed description	Flexible reflective sheeting for high visibility Unbreakable flexible spring design Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Fast and easy installation on any paved surface Barricade flashers, sign boards and accessories can be attached to Evelux Delineator adaptor Damaged parts can be replaced	
ISO Compliant	DIN EN ISO 9001:2008	
Installation Configuration	Permanently glue mounted base kit with removable Delineator post	



Item#	Detailed description
194 A	D 3.14" Delineator adaptor
159 A	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit

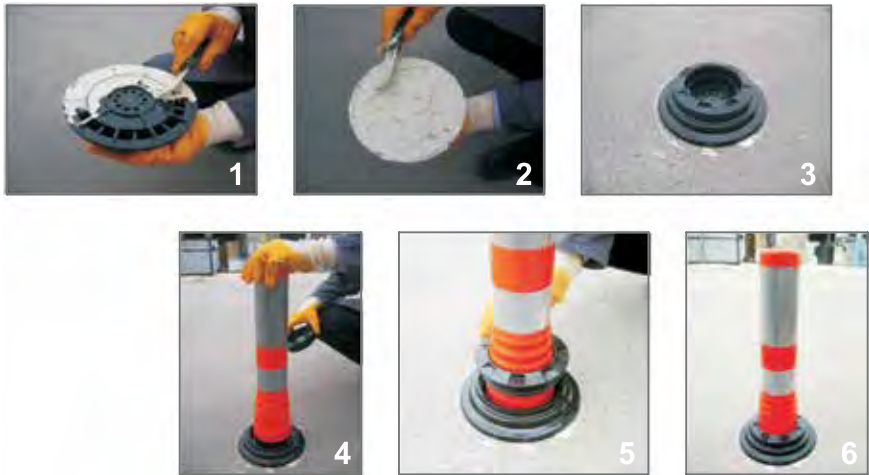



Plastic (PE) Permanent Bollards



12223 UB R



Blue



Green



12213 UB R



Blue



Green



Plastic (PE) Permanent Bollards



12205 UB R






Blue



Green




			
Item#	12205 UB R	12223 UB R	12213 UB R
Dimensions (D x H)	10.63"x19.68" (270x500mm)	7.87"x19.68" (200x500mm)	7.87"x31.49" (200x800mm)
Weight	3.26 lbs	2.75 lbs	3.85 lbs
Material	PE		
Detailed description	Reflective sheeting for high visibility Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Fast and easy installation on any paved surface Multiple color selection black / blue / green		
ISO Compliant	DIN EN ISO 9001:2008		
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit		



Traffic Safety Cones

- Highly visible reflective sheeting.
- Broad angled and weighted bases provide wind resistance and stability.
- Stackable design to minimize taking up space.
- Manufactured from PVC material gives solid and durable features and provides a longer life for continuous outdoor usage. Bright orange color and reflective sheeting make them highly visible.
- PVC cones have flexible and unbroken features. Best for work areas and dense traffic. UV protected bright orange color provides better visibility and long life color fading.
- Operating temperature range -4°F to + 14°F

35.43” (height) PVC Traffic Safety Cones

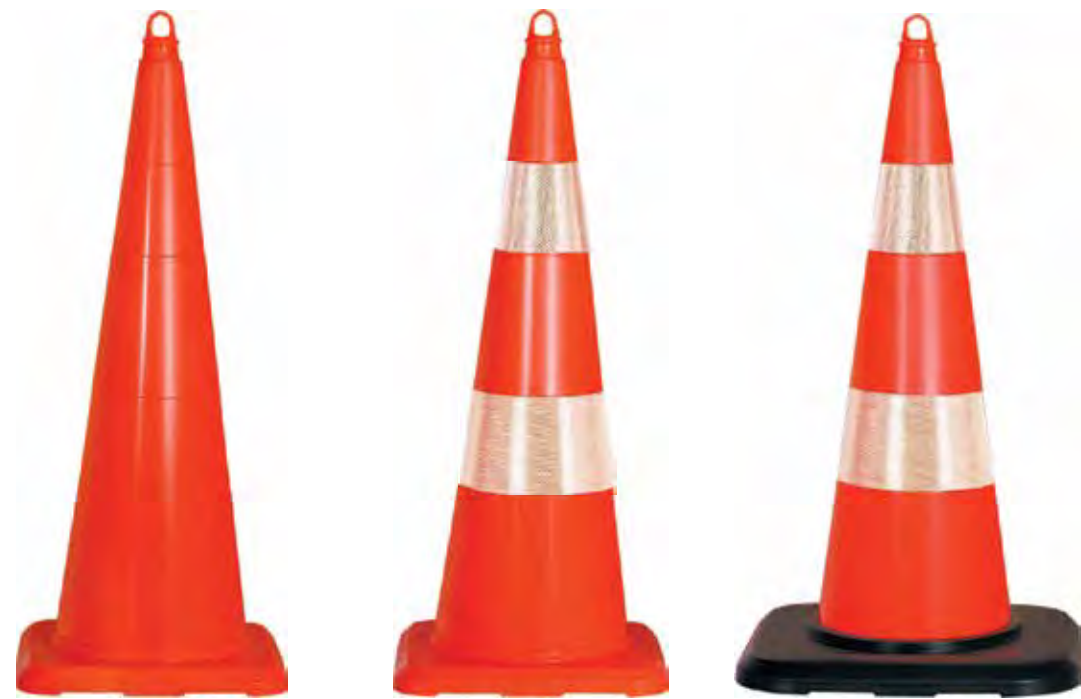

12321 TK

12325 TK R2

12327 TK A R2







190A Weighted base 15.15"x15.15"x1.96"


Item#	12321 TK	12325 TK R2	12327 TK A R2
Dimensions (L x H)	15.15"x35.43" (385x900mm)	15.15"x35.43" (385x900mm)	19.09"x35.43" (485x900mm)
Weight	7.93 lbs	7.93 lbs	15.65 lbs
Material	PVC	PVC	PVC body PP weighted base
Detailed description	Reflective sheeting for high visibility Unbreakable flexible material Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be attached to Evelux Cone adaptor Weighted base is Optional		
ISO Compliant	DIN EN ISO 9001:2008		



29.52” (height) PVC Traffic Safety Cones



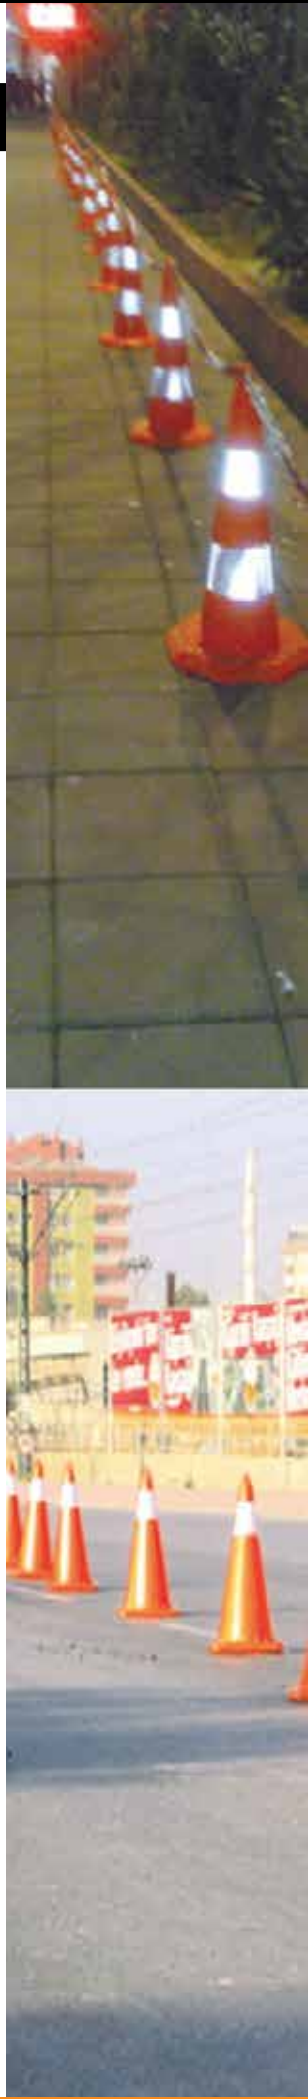


				
Item#	12305 TK	12307 TK R1	12309 TK R2	12315 TK A R2
Dimensions (L x H)	15.5"x29.52" (385x750mm)	15.5"x29.52" (385x750mm)	15.5"x29.52" (385x750mm)	19.09"x29.52" (485x750mm)
Weight	7.05 lbs	7.05 lbs	7.05 lbs	14.77 lbs
Material	PVC	PVC	PVC	PVC body PP weighted base
Detailed description	Reflective sheeting for high visibility Unbreakable flexible material Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be attached to Evelux Cone adaptor Weighted base is Optional			
ISO Compliant	DIN EN ISO 9001:2008			



27.55” (height) PVC Traffic Safety Cones



			
Item#	12333 TK	12335 TK R1	12337 TK R2
Dimensions (L x H)	14.96"x27.55" / (380x700mm)		
Weight	5.07 lbs		
Material	PVC		
Detailed description	Reflective sheeting for high visibility Unbreakable flexible material Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be attached to Evelux Cone adaptor		
ISO Compliant	DIN EN ISO 9001:2008		



20.47" (height) PVC Traffic Safety Cones






12328 TK



12330 TK R1



12332 TK R2

			
Item#	12328 TK	12330 TK R1	12332 TK R2
Dimensions (L x H)	12.59"x20.47" / (320x520mm)		
Weight	2.64 lbs		
Material	PVC		
Detailed description	Reflective sheeting for high visibility Unbreakable flexible material Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be attached to Evelux Cone adaptor		
ISO Compliant	DIN EN ISO 9001:2008		



19.68" (height) PVC Traffic Safety Cones



12303 TK R1



12314 TK



12316 TK R2









12304 TK



12306 TK R1



12326 TK A R1

						
Item#	12303 TK R1	12314 TK	12316 TK R2	12304 TK	12306 TK R1	12326 TK A R1
Dimensions (L x H)	8.66"x12.59" (220x320mm)	13.77"x19.68" (350x500mm)	13.77"x19.68" (350x500mm)	11.22"x19.68" (285x500mm)	11.22"x19.68" (285x500mm)	15.15"x19.68" (385x500mm)
Weight	1.43 lbs	3.74 lbs	3.74 lbs	2.86 lbs	2.86 lbs	5.95 lbs
Material	PVC	PVC	PVC	PVC	PVC body	PVC body PP weighted base
Detailed description	Reflective sheeting for high visibility Unbreakable flexible material Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be attached to Evelux Cone adaptor Weighted base is Optional					
ISO Compliant	DIN EN ISO 9001:2008					



Accessories



Item#	Detailed description	Dimensions
123 A	Yellow & black plastic chain	9.84' L
127 A	Red & white plastic chain	9.84' L
152 A R	Cone bar	59.5" L
126 A	Cone adaptor	---
175 A	Plastic chain clips	---
174 A	Ring adaptor for plastic chain	---



Delineator Markers, Traffic Channelizers, Barricades, Barriers and Vertical Panels

- Customized panel graphics, including colors, available on request.
- Delineator Markers and Traffic Channelizers are available in different heights, weights and colors.
- Evelux Barricade flashers, sign boards and accessories can be attached.
- Chain hole features provide a functional use to control dense traffic efficiently and crowd control.
- High quality materials keep the products maintenance free.
- Traffic Control Barricades and Safety Barriers with Vertical Panels are equipped with foldable feet and handles to provide easy carrying and storage.
- Weighted base for maximum stability.
- Delineator Markers and Traffic Channelizers Posts are an efficient solution for crowd guidance and traffic control.
- Operating temperature range -4°F to + 14°F






43.30" (height) Delineator Marker and Traffic Channelizer Posts



12418 DB

12420 DB R

12422 DB R

			
Item#	12418 DB	12420 DB R	12422 DB R
Dimensions (D x H)	3.14"x43.30" (80/1100mm)	3.14"x43.30" (80/1100mm)	3.14"x43.30" (80/1100mm)
Weight	14.33 lbs	14.33 lbs	14.33 lbs
Material	PPC – PVC base		
Detailed description	Reflective sheeting for high visibility Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be directly attached Rigid PVC weighted base for maximum stability Integral holes for plastic chain		
ISO Compliant	DIN EN ISO 9001:2008		






47.24" (height) Delineator Marker and Traffic Channelizer Posts



12402 DB

12404 DB R




12414 DB R

			
Item#	12402 DB	12404 DB R	12414 DB R
Dimensions (D x H)	4.33"x47.24" (110/1200mm)	4.33"x47.24" (110/1200mm)	4.33"x47.24" (110/1200mm)
Weight	26.46 lbs	26.46 lbs	26.46 lbs
Material	PPC – PP base		
Detailed description	Reflective sheeting for high visibility Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be directly attached PP Weighted base for maximum stability Integral holes for plastic chain		
ISO Compliant	DIN EN ISO 9001:2008		




39.37" (height) Delineator Marker and Traffic Channelizer Posts




			
Item#	12401-1 DB R	12403-1 DB R	12409-1 DB R
Dimensions (D x H)	2.48"x39.37" (63/1000mm)	2.48"x39.37" (63/1000mm)	2.48"x39.37" (63/1000mm)
Weight	9.92 lbs	9.92 lbs	9.92 lbs
Material	PPC – PP base		
Detailed description	Reflective sheeting for high visibility Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be directly attached PP Weighted base for maximum stability Integral holes for plastic chain		
ISO Compliant	DIN EN ISO 9001:2008		



31.49" (height) Delineator Marker and Traffic Channelizer Posts

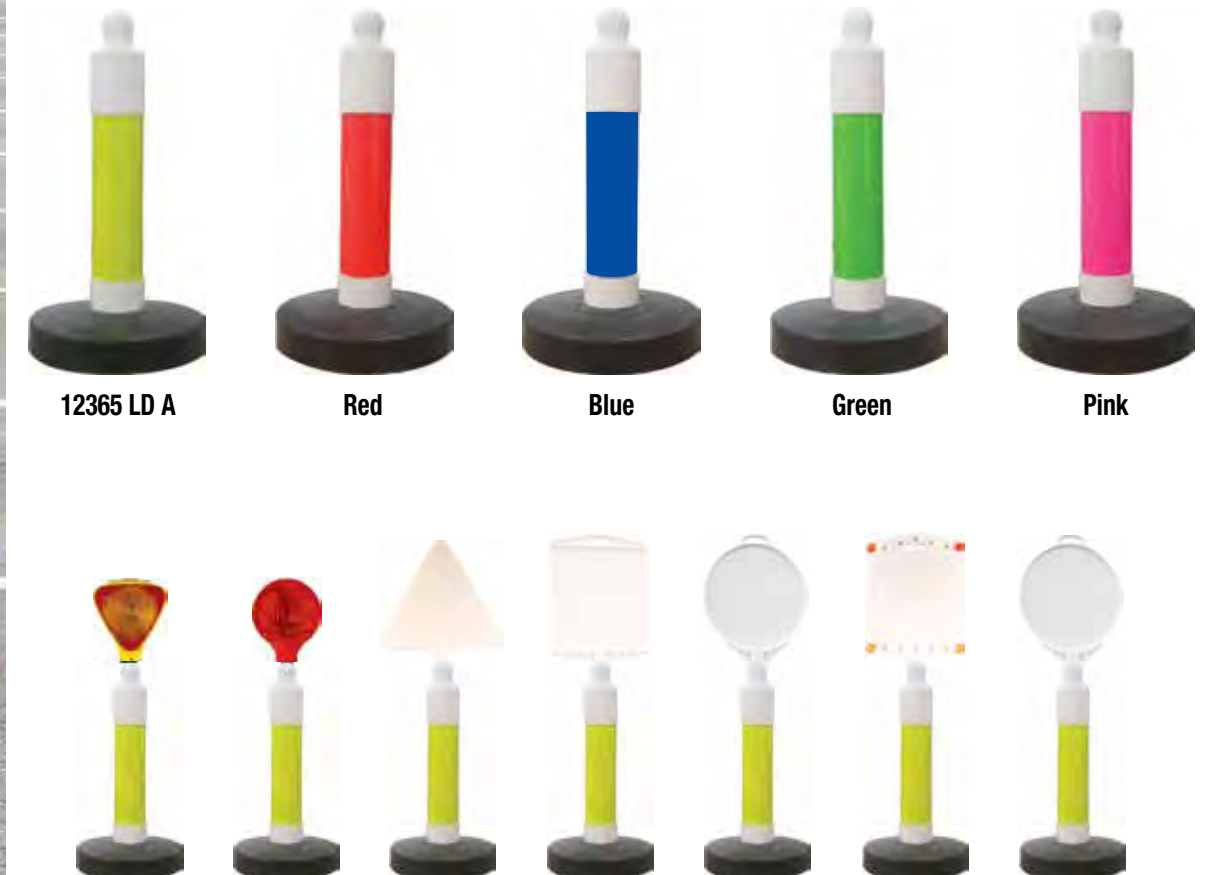


	
Item#	12365 LD A
Dimensions (D x H)	4.33"x31.49" / (110/800mm)
Weight	26.23 lbs
Material	PE – PPC base
Detailed description	Fluorescent unique colors for high visibility Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be directly attached PPC weighted base for maximum stability
ISO Compliant	DIN EN ISO 9001:2008

Traffic Control Barricades and Safety Barriers with Vertical Panels

Customized panel graphics, including colors, available on request



12405 DB R



A




B



C



12407 DB R



A




B



C



Customized panel graphics, including colors, available on request

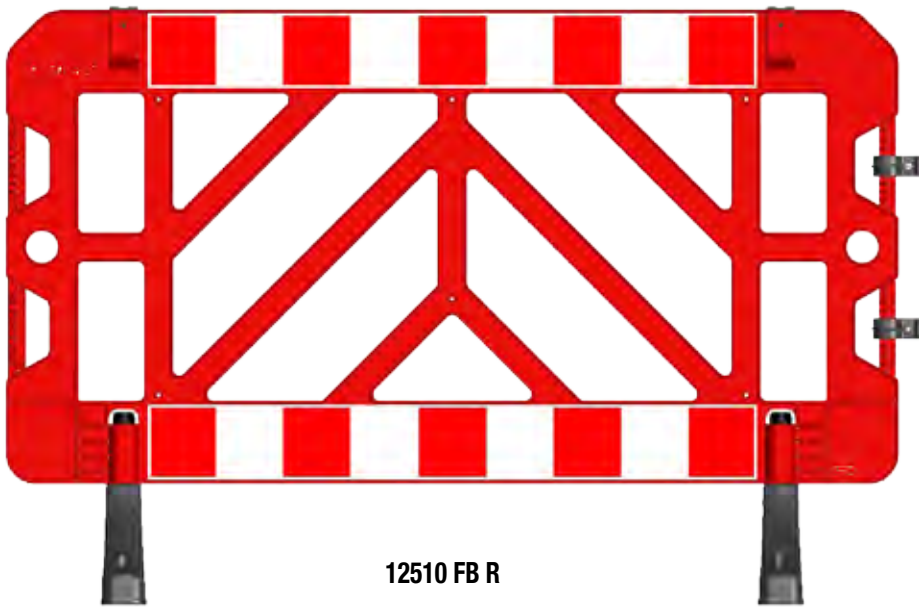

12510 FB R







12512 FB R



A





192 A


				
Item#	12405 DB R	12407 DB R	12510 FB R	12512 FB R
Dimensions (W x H)	70.86"x47.24" (1800x1200mm)	70.86"x47.24" (1800x1200mm)	59.05"x39.37" 1500x1000mm	59.05"x39.37" 1500x1000mm
Weight	68.35 lbs	59.53 lbs	27.56 lbs	27.56 lbs
Material	PPC post – PVC panel		PVC weighted feet – PPC body	
Detailed description	Reflective sheeting for high visibility Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and, PVC Panel board and accessories can be directly attached Weighted base for maximum stability Customized panel graphics, including colors, available on request			
ISO Compliant	DIN EN ISO 9001:2008			




Folding Barricades and Safety Barriers with Vertical Panels

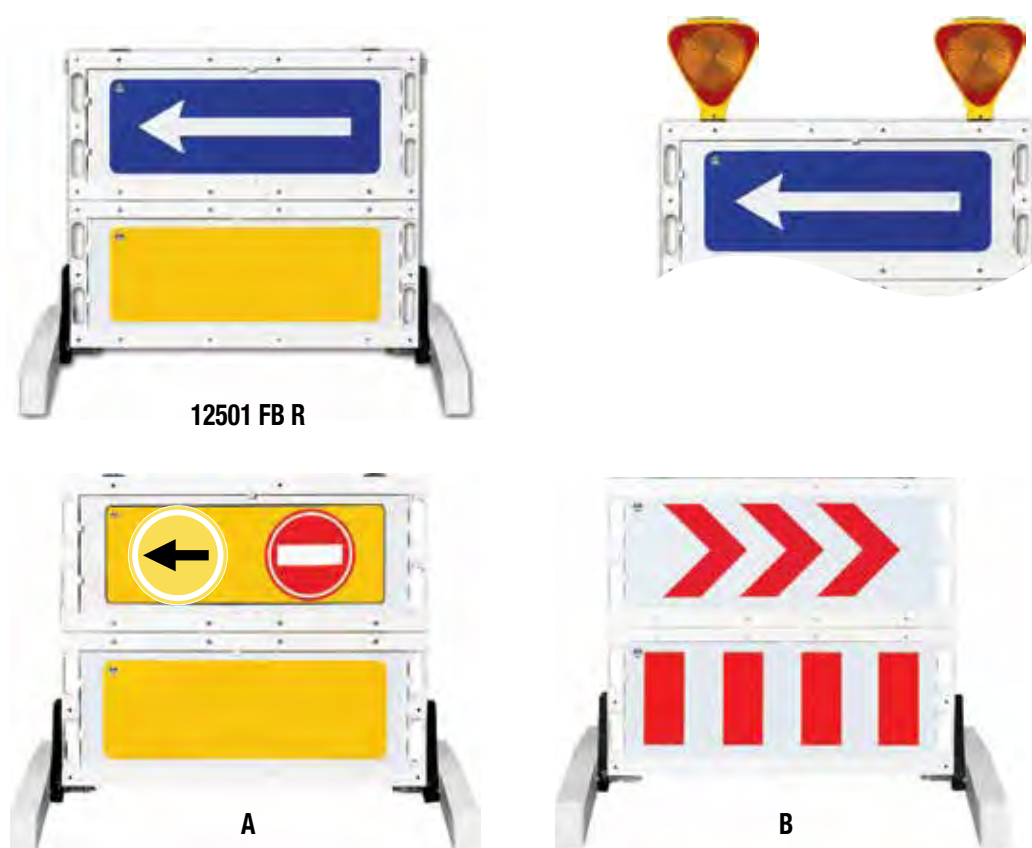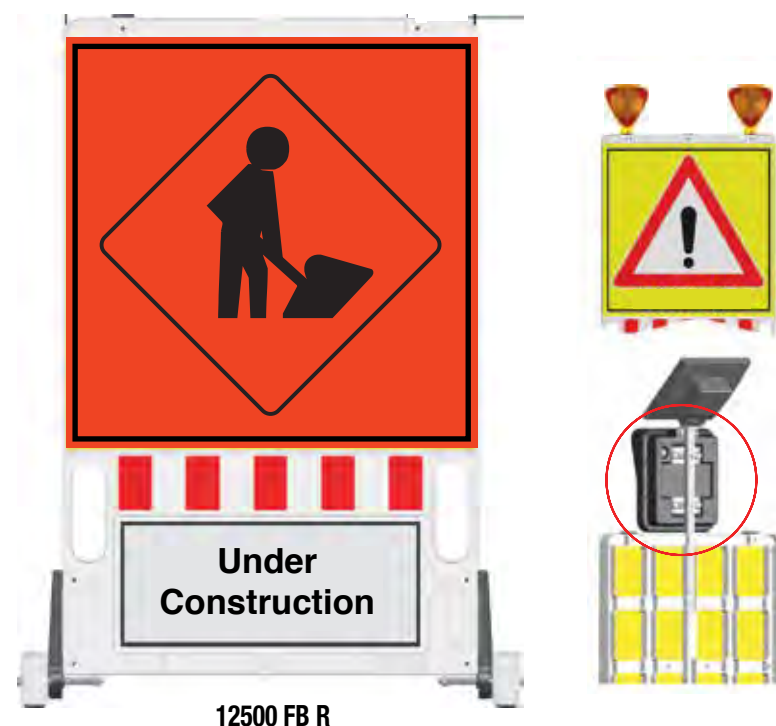Customized panel graphics, including colors, available on request

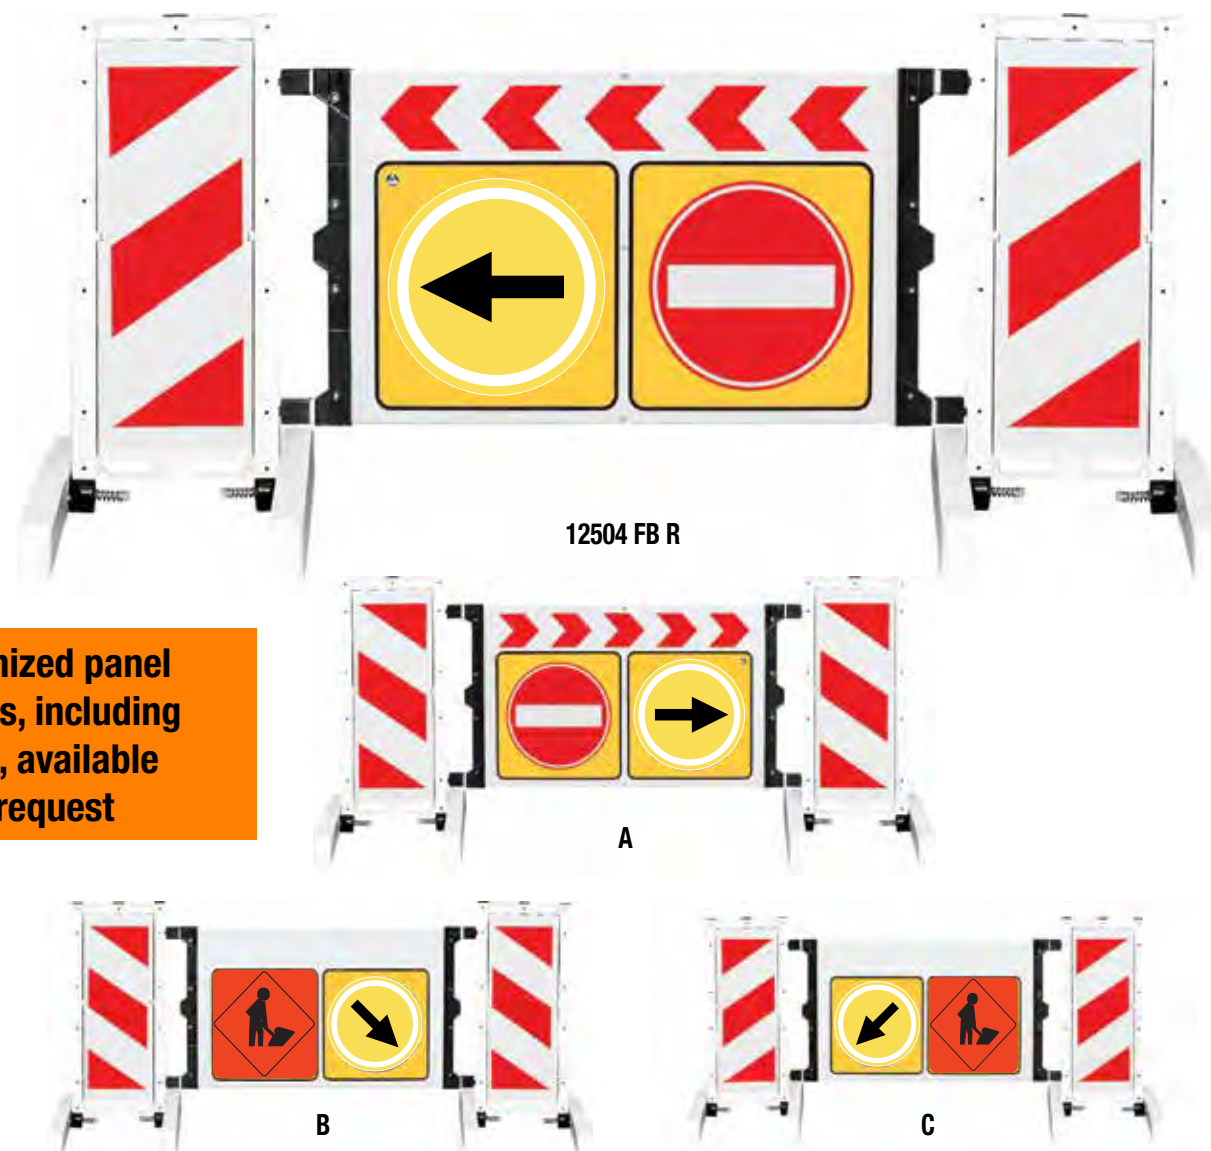


Customized panel graphics, including colors, available on request






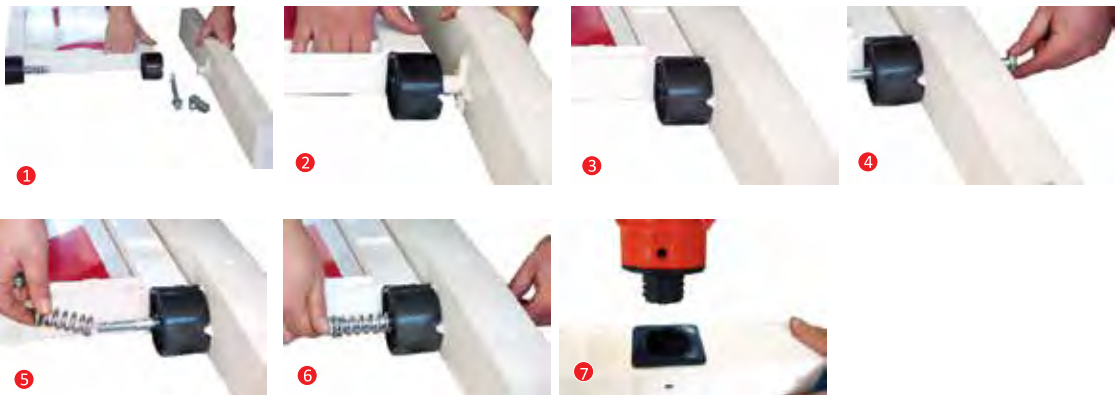
			
Item#	12500 FB R	12501 FB R	12504 FB R
Dimensions (W x H)	35.43"x59.05" (900x1500mm)	39.37"x35.43" (1000x900mm)	92.91"x43.30" (2360x1100mm)
Weight	39.69 lbs	44.10 lbs	81.58 lbs
Material	PPC frame – PVC panel		
Detailed description	Reflective sheeting for high visibility Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and, PVC Panel board and accessories can be directly attached Weighted base for maximum stability Customized panel graphics, including colors, available on request Weighted base for maximum stability Folding base for minimum storage space Carrying handles		
ISO Compliant	DIN EN ISO 9001:2008		

Folding Vertical Panels

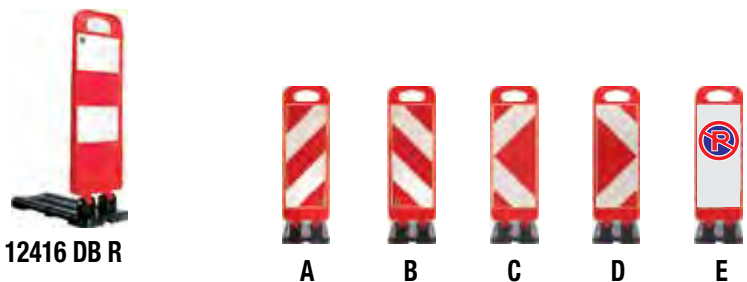Customized panel graphics, including colors, available on request



			
Item#	12416 DB R	12415 DB R	12503 FB R
Dimensions (L x W x H)	17.71"x7.87"x27.55" (450x200x700mm)	18.8"x7.87"x39.37" (480x200x1000mm)	16.53"x43.30" (420x1100mm)
Weight	14.33 lbs	24.47 lbs	34.17 lbs
Material	PPC frame – PVC panel		
Detailed description	Reflective sheeting for high visibility Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and, PVC Panel board and accessories can be directly attached Weighted base for maximum stability Customized panel graphics, including colors, available on request Weighted base for maximum stability Folding base for minimum storage space Carrying handles		
ISO Compliant	DIN EN ISO 9001:2008		




Accessories



Item#	Detailed description	Dimensions WxH
155A	Delineator barricades panel holder adaptor	---
128 A	Red & white plastic chain	82' L
129 A	Yellow & black plastic chain	82' L
127 A	Red & white plastic chain	9.84' L
123 A	Yellow & black plastic chain	9.84' L
149 A	Delineator barricade panel board holder	59.05"x29.52" / (1500x750mm)
164 A	PVC Panel board - blank	49.21"x29.52" / (1250x750mm)
150 A	Delineator barricade panel board holder	59.05"x12.40" / (1500x315mm)
142 A	PVC Panel board - blank	35.43"x12.40" / (900x315mm)



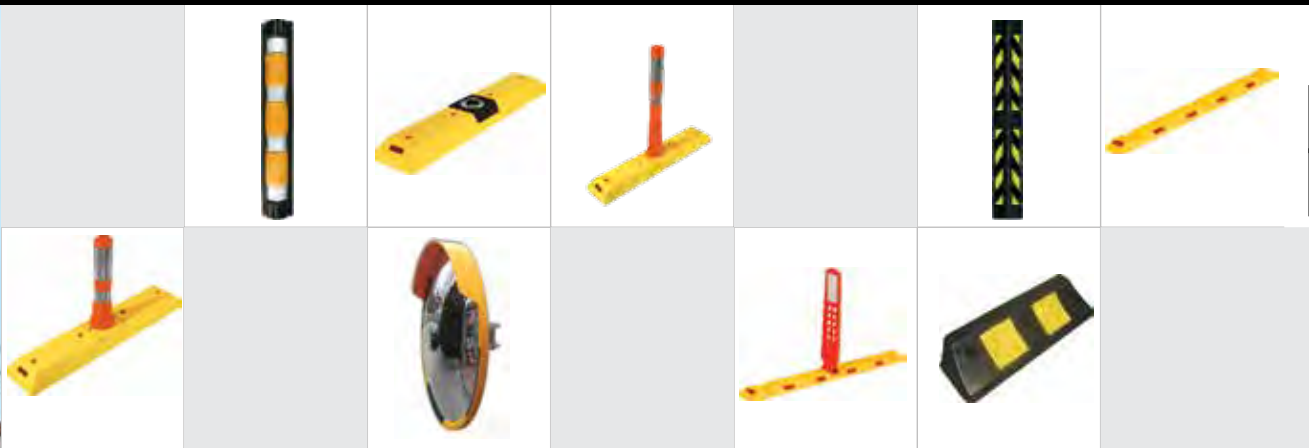



Traffic Lane Channelizers, Parking Curbs, Corner Guards and Convex Mirror

- Delineator posts and flaps are designed with a reactive spring and made from flexible material to give with impact and rebound towards traffic.
- When posts and flaps are damaged, they can be exchanged easily with their spare parts.
- Effective and continuous warning with reflective sheeting, lenses, cat eyes and bright colors.
- Warning effect can be enhanced by attaching Evelux barricade flashers and sign boards on top of posts.
- Parking Curbs with reflective material are effective during parking.
- Corner guide with its bright color, elastic cushions and reflective rings is best for closed car parks to prevent accidental crushing.
- Convex mirror is the best solution to help drivers and road users to see behind blind spots
- Convex mirrors with its functional installation parts have 45° movement up and down as well as side to side.
- Convex mirrors installation parts are designed as a hinge. With additional installation parts it's possible to install on a pole or directly on the wall.
- Convex mirror is made of durable acrylic plastic material.
- Operating temperature range -4°F to + 14°F




Traffic Lane Channelizers with Polyurethane Flexible Delineator Posts








		
Item#	12218 UB R	12219 UB R
Dimensions (L x W x H)	39.37"x7.87"x17.91" (1000x200x455mm)	39.37"x7.87"x29.72" (1000x200x755mm)
Weight	9.15 lbs	9.92 lbs
Material	PPC base - TPU polyurethane Delineator	
Detailed description	Flexible reflective sheeting for high visibility Unbreakable flexible spring design Fast and easy installation on any paved surface Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be attached to Evelux Delineator adaptor Damaged parts can be replaced	
ISO Compliant	DIN EN ISO 9001:2008	
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit	

Traffic Lane Channelizers with Polyurethane Flexible Delineator Posts

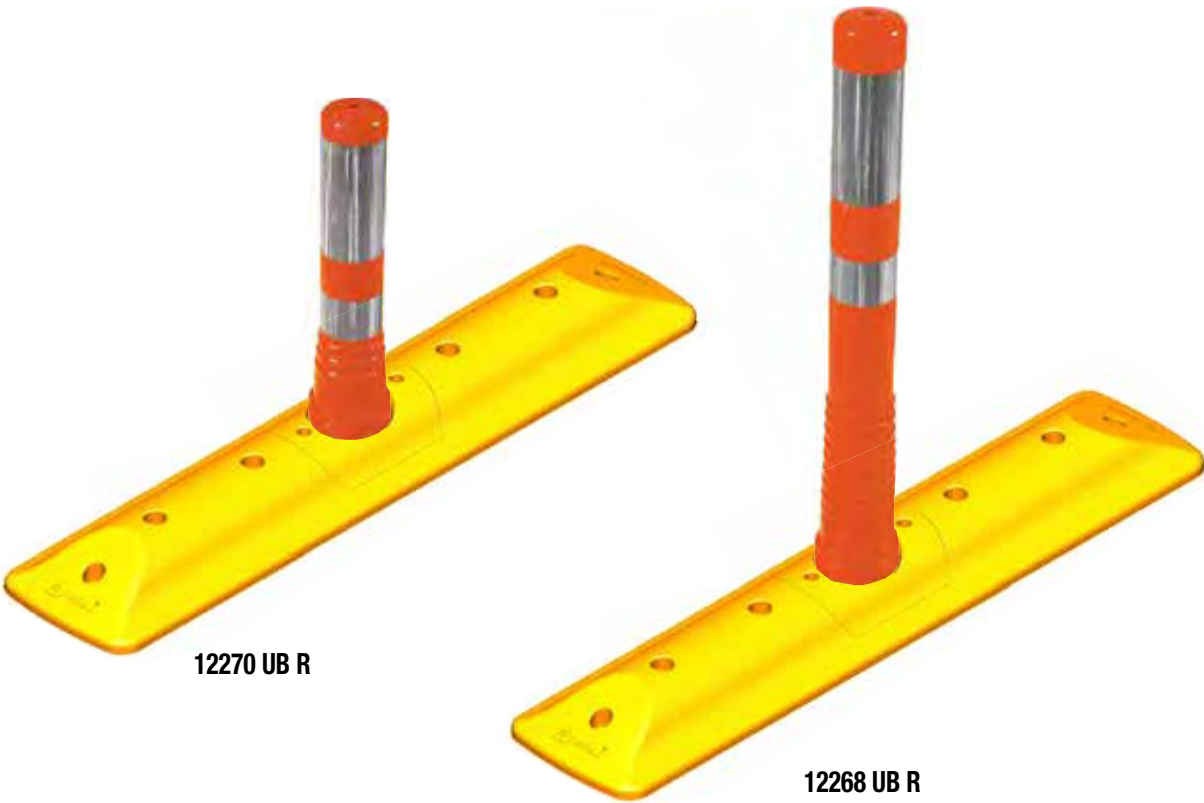



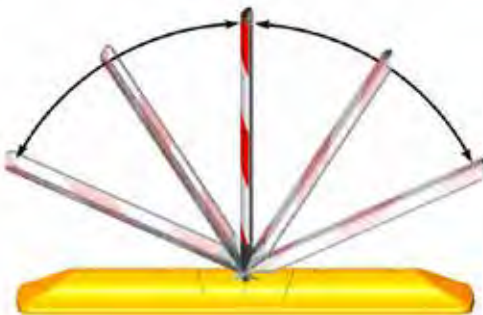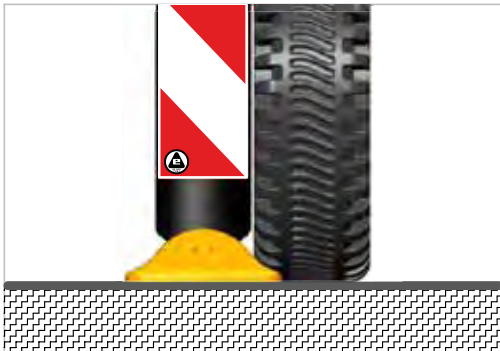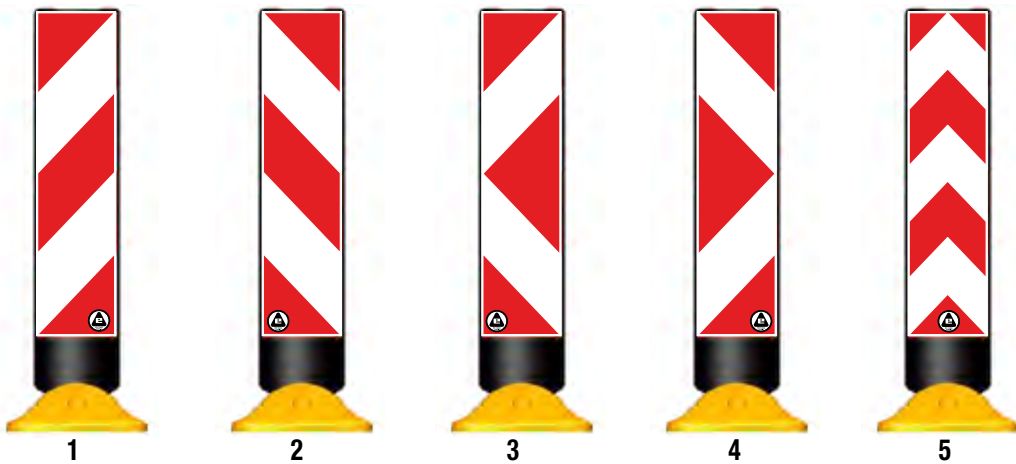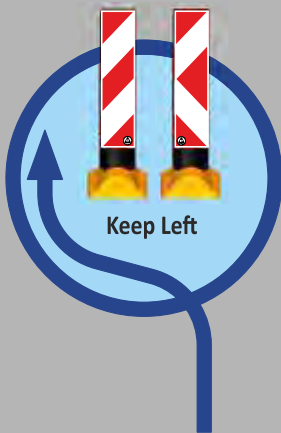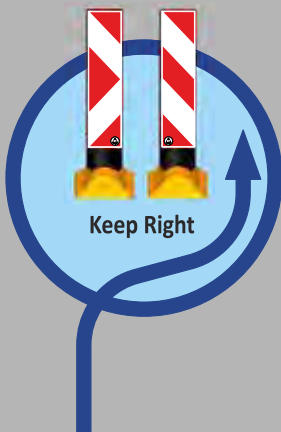


Item#	12270 UB R	12268 UB R	12266 UB R
Dimensions (L x W x H)	39.37"x8.66"x17.91" (1000x220x455mm)	39.37"x8.66"x29.72" (1000x220x755mm)	39.37"x8.66"x29.72" (1000x220x755mm)
Weight	8.81 lbs	9.47 lbs	8.81 lbs
Material	PPC base - TPU polyurethane Delineator		PPC base -PPC Flap
Detailed description	Flexible reflective sheeting for high visibility Unbreakable flexible spring design Fast and easy installation on any paved surface Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Barricade flashers, sign boards and accessories can be attached to Evelux Delineator adaptor Damaged parts can be replaced		
ISO Compliant	DIN EN ISO 9001:2008		
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit		






Traffic Lane Channelizers with PE Flexible Flaps







					
Item#	12203 UB R	12207 UB R	12204 UB R	12206 UB R	12209 UB R
Dimensions (L x W x H)	47.24"x5.90"x11.02" (1200x150x280mm)	10.23"x6.29"x11.02" (260x160x280mm)	47.24"x5.90"x23.62" (1200x150x600mm)	10.23"x6.29"x23.62" (260x160x600mm)	10.23"x6.29"x11.61" (260x160x295mm)
Weight	5.51 lbs	1.65 lbs	5.95 lbs	1.98 lbs	1.65 lbs
Material	PPC base -PE Delineator				PPC base - TPU Delineator
Detailed description	Flexible reflective sheeting for high visibility Fast and easy installation on any paved surface Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Damaged parts can be replaced Base with all direction reflective lenses				
ISO Compliant	DIN EN ISO 9001:2008				
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit				

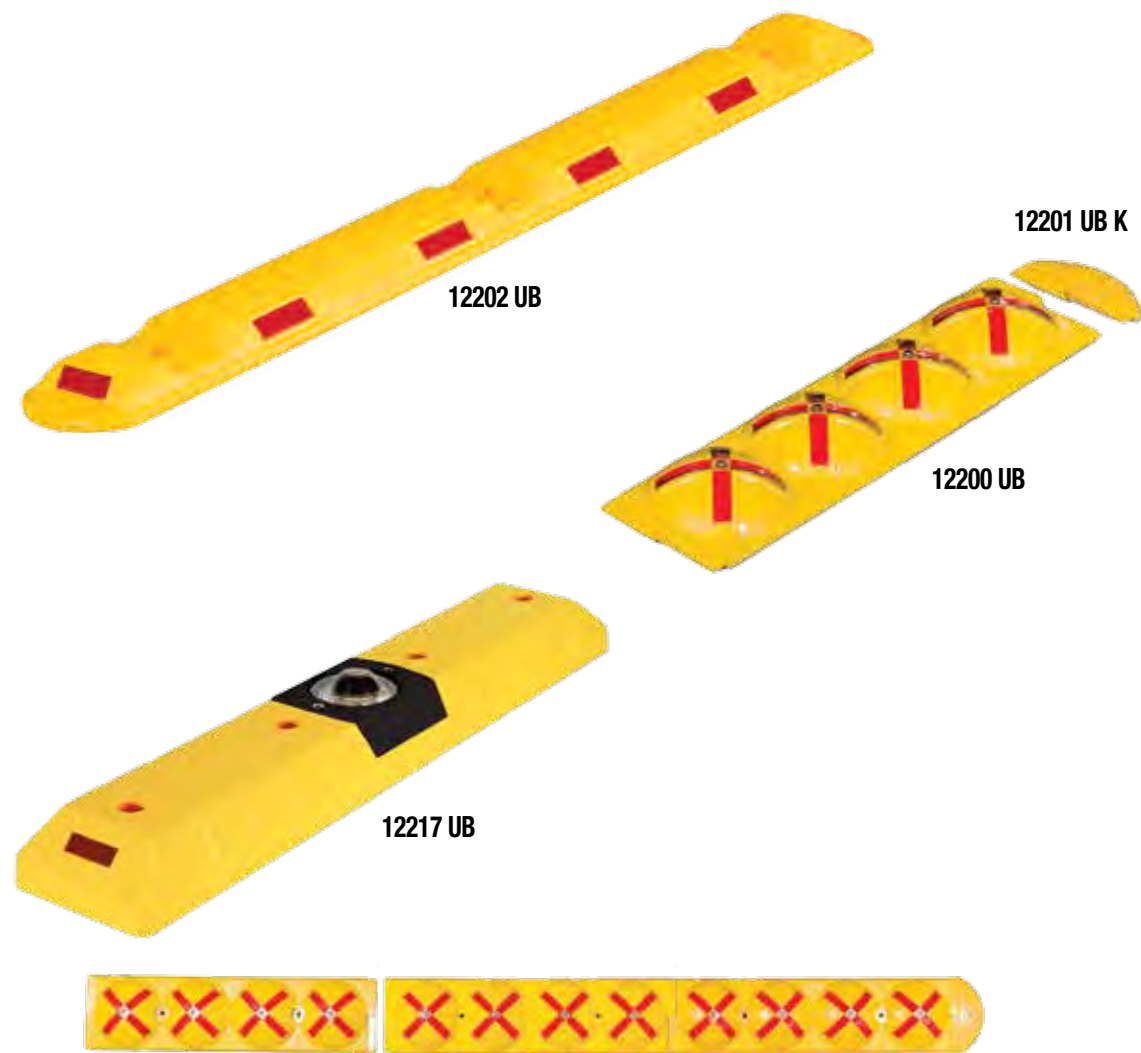

Traffic Lane Channelizers






				
Item#	12202 UB	12217 UB	12200 UB	12201 UB K
Dimensions (L x W x H)	47.24"x5.90"x1.96" (1200x150x50mm)	39.37"x7.87"x3.14" (1000x200x80mm)	23.62"x5.90"x1.96" (600x150x50mm)	2.36"x5.90"x0.59" (60x150x15mm)
Weight	5.07 lbs	9.04 lbs	2.97 lbs	0.14 lbs
Material	PPC		ABS	
Detailed description	All direction reflective lenses Modular design expands to any road width Fast and easy installation on any paved surface Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture			
ISO Compliant	DIN EN ISO 9001:2008			
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit			






Traffic Lane Channelizers



			
Item#	12262 UB	12220 UB	12260 UB
Dimensions (L x W x H)	39.37"x8.66"x3.14" (1000x220x80mm)	39.37"x7.87"x3.14" (1000x200x80mm)	39.37"x5.90"x2.36" (1000x150x60mm)
Weight	7.71 lbs	8.15 lbs	2.12 lbs
Material	PPC		PVC
Reflective Visibility	4+4 Cat Eyes	Solar Powered 3+3 LEDs	Yellow Reflective type
Detailed description	Modular design expands to any road width Fast and easy installation on any paved surface Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture		
ISO Compliant	DIN EN ISO 9001:2008		
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit		

Parking Curbs

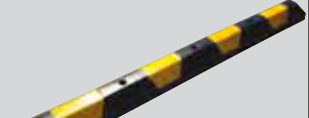

			
Item#	12235 UB	12233 UB	12231 UB
Dimensions (L x W x H)	21.65"x5.90"x3.93" (550x150x100mm)	43.30"x5.90"x3.93" (1100x150x100mm)	70.86"x5.90"x3.93" (1800x150x100mm)
Weight	4.73 lbs	10.25 lbs	16.53 lbs
Material	PPC		
Detailed description	Yellow Black Contrasting coloros Fast and easy installation on any paved surface Maintenance free Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, extreme temperatures and moisture		
ISO Compliant	DIN EN ISO 9001:2008		
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit		





Parking Curbs



12216 UB R



12217 UB

		
Item#	12216 UB R	12217 UB
Dimensions (L x W x H)	19.68"x6.29"x3.93" 500x160x100mm	39.37"x7.87"x3.14" (1000x200x80mm)
Weight	5.29 lbs	9.04 lbs
Material	PVC	PPC
Detailed description	Reflective sheeting for high visibility Fast and easy installation on any paved surface Cost efficient and Long lasting High durability, will not crack, warp, chip or rot, Resistant to UV sunlight, oil, salt, Extreme temperatures and moisture	
ISO Compliant	DIN EN ISO 9001:2008	
Installation Configuration	D 0.70"x L 3.54" / (D 18mm x L 90mm) Evelux plastic anchors, and metal screw kit	



Plastic Corner Guards






12296 UB R



12294 UB R




12292 UB R

			
Item#	12296 UB R	12294 UB R	12292 UB R
Dimensions (L x W x H)	2.75"x4.72"x31.49" (70x120x800mm)	2.75"x4.72"x31.49" (70x120x800mm)	3.54"x5.51"x35.43" (90x140x900mm)
Weight	4.18 lbs	4.18 lbs	3.96 lbs
Material	PVC		PVC- PE
Detailed description	Reflective sheeting for high visibility Maintenance free High durability, will not crack, warp, chip or rot. Resistant to UV sunlight, oil, salt, extreme temperatures and moisture Fast and Easy installation		
ISO Compliant	DIN EN ISO 9001:2008		
Installation Configuration	D 0.31"xL 1.81" Evelux plastic anchors kit		




Acrylic Convex Mirrors

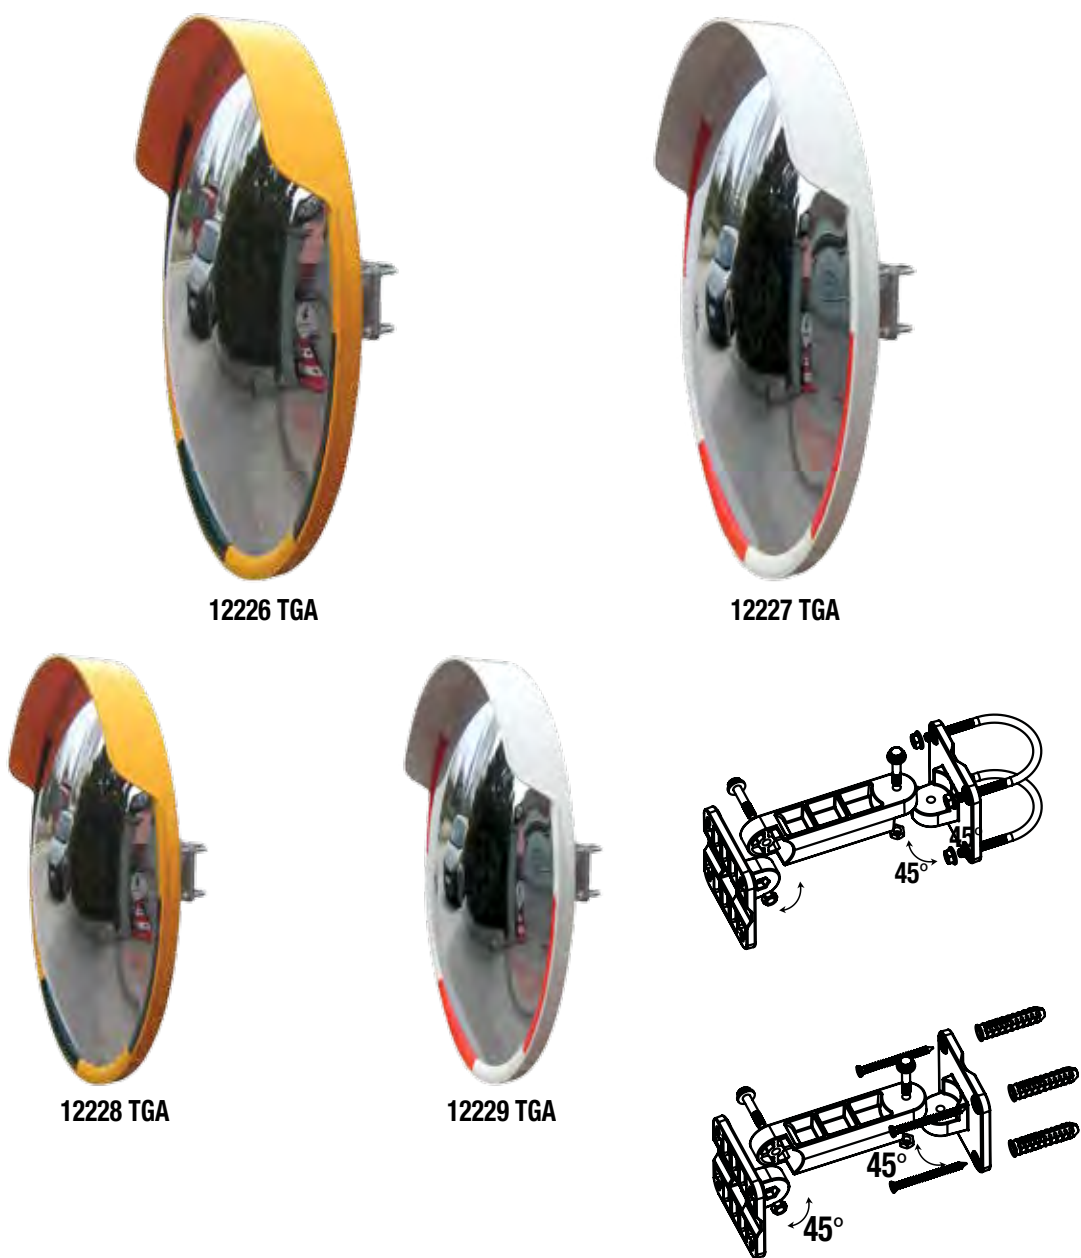



Item#	12226 TGA	12227 TGA	12228 TGA	12229 TGA
Diameter	31.49" (800mm)	31.49" (800mm)	23.62 (600mm)	23.62 (600mm)
Weight	13.23 lbs	13.23 lbs	8.8 lbs	8.8 lbs
Material	PPC			
Detailed description	Thickness: 2 mm acrylic 1.96" to 2.75" (50 -75mm) post mounting bracket / wall mounting bracket			
ISO Compliant	DIN EN ISO 9001:2008			

Spare Parts and Installation Kit

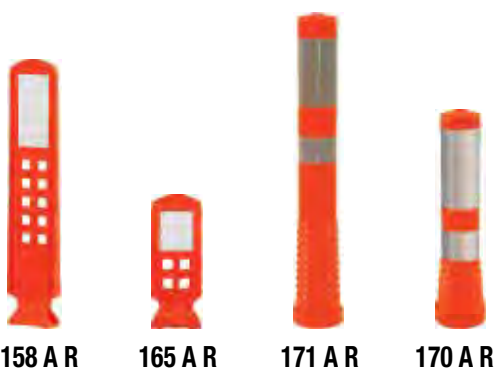

Item#	Detailed description	Dimensions WxH
194 A	Delineator adaptor	D 3.66" / H .22"
158 A R	Large flap	H 23.62"
165 A R	Small flap	H 11.02"
171 A R	Large Delineator post	H 29.52"
170 A R	Small Delineator post	H 17.71"
159 A	Evelux plastic anchors, and metal screw kit	D 0.70"x L 3.54" (D 18mmx L 90mm)



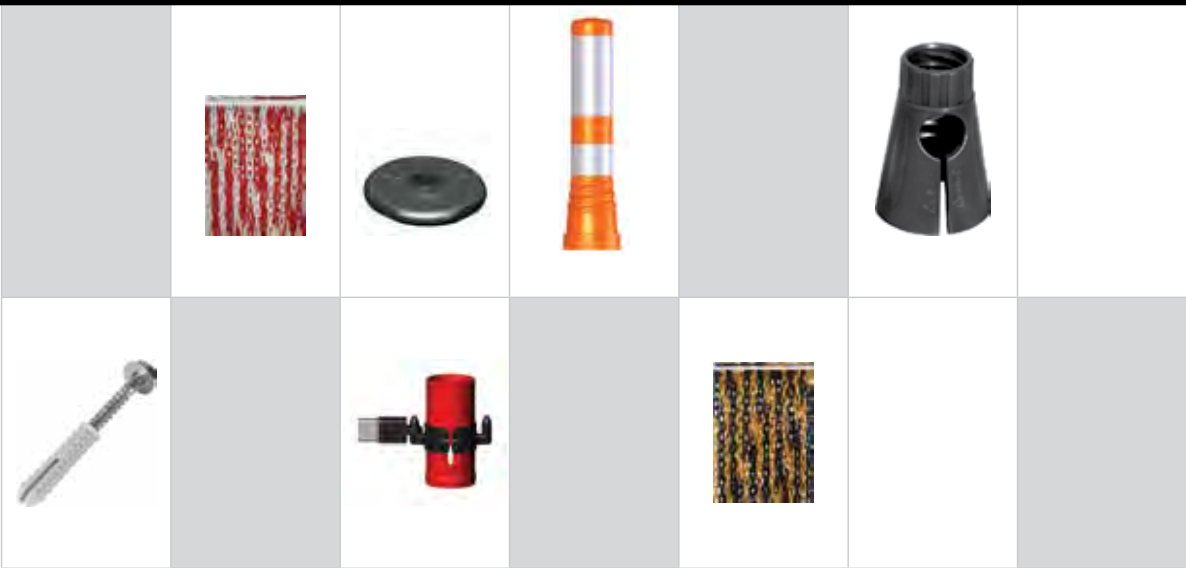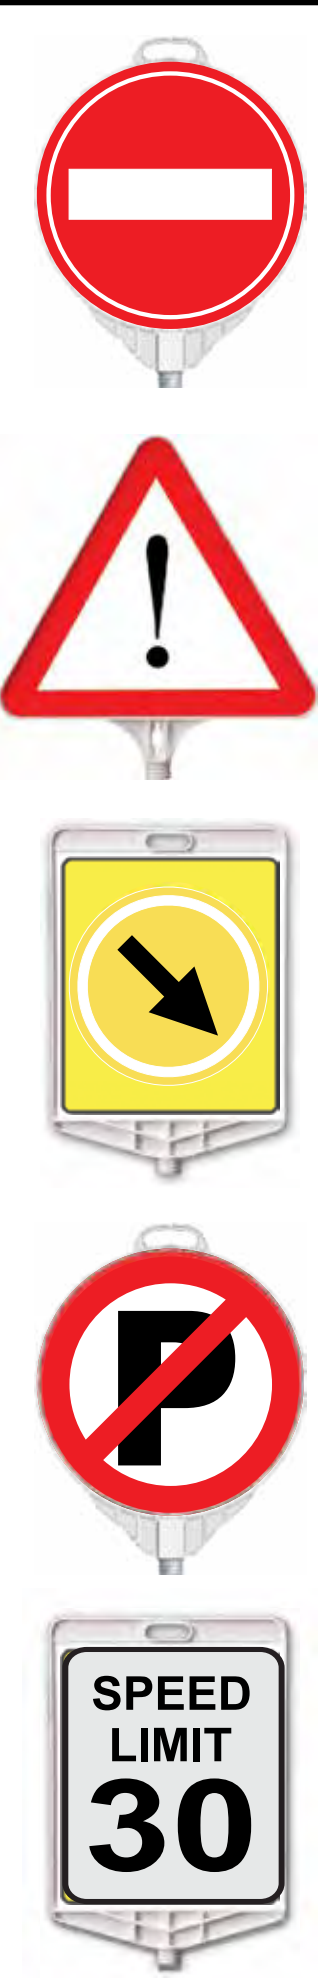

Accessories, Spare Parts and Installation kits

- Customized panel graphics, including colors, available on request.
- Signs & boards are available in different designs and warning sheets in compliance with usage area.
- Accessories and spare parts are easily assembled. No need for special tools.
- Evelux installation kit is designed to work with any paved surface, including asphalt. By easy drilling and screwing, you will get the strongest and the most durable mount to the surface.



			
Item#	111 A	110 A	120 A
Detailed description	Rectangular sign board	Triangular sign board	Circular sign board
Dimensions	13.38" W / 16.14" H	H 15.35"	D 380"

- Customized panel graphics, including colors, available on request
- Can be attached to Evelux Delineator adaptor, Cone adaptor, Delineator Marker Posts, Traffic Channelizer Posts, Traffic Control Barricades and Safety Barriers with Vertical Panels



Item#	Detailed description	Dimensions
196 A	Large Circular sign board	D 14.96"
110 A	Triangular sign board	H 15.35"
111 A	Rectangular sign board	13.77" W / 16.14" H
120 A	Circular sign board	D 11.02"
124 A F	Circular sign board "No parking"	D 11.02"
113 A	Rectangular sign board	11.81" W / 11.81" H
126 A	Cone adaptor for Barricade flashers, sign boards and accessories	---
194 A	D 3.14" Delineator adaptor for Barricade flashers, sign boards and accessories	---

- Customized panel graphics, including colors, available on request
- Can be attached to Evelux Delineator adaptor, Cone adaptor, Delineator Marker Posts, Traffic Channelizer Posts, Traffic Control Barricades and Safety Barriers with Vertical Panels

Accessories



128 A



129 A



127 A



123 A



152 A R



174 A



175 A



159 A



160 A



161 A



163 A




173 A



172 A

Item#	Detailed description	Dimensions
128 A	Red & white plastic chain	82' L
129 A	Yellow& black plastic chain	82' L
127 A	Red & white plastic chain	9.84' L
123 A	Yellow & black plastic chain	9.84' L
152 A R	Cone bar	59.05"L
159 A	Evelux plastic anchors, and metal screw kit	D 0.70"x L 3.54" / (D 18mm x L 90mm)
174 A	Ring adaptor for plastic chain	---
175 A	Plastic chain clips	---


Spare Parts

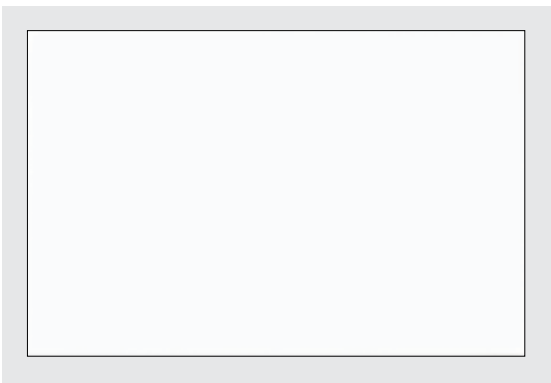


164 A



149 A

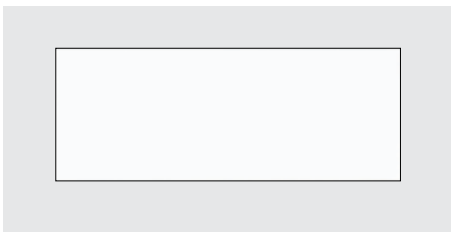

142 A

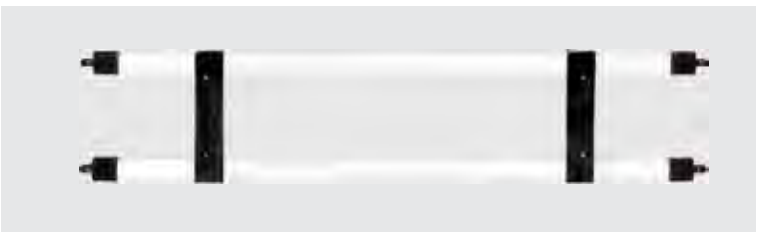

150 A



155 A



192 A



115 A



191 A

Item#	Detailed description	Dimensions
164 A	PVC Panel board - blank	49.21"x29.52" / (1250x750mm)
149 A	Delineator barricade panel board holder	59.05"x29.52" / (1500x750mm)
142 A	PVC Panel board - blank	35.43"x12.40" / (900x315mm)
150 A	Delineator barricade panel board holder	59.05"x12.40" / (1500x315mm)
155A	Delineator barricades panel holder adaptor	---
115 A	Spare PVC weighted foot	---
192 A	Spare clips for Safety Barrier	---



165 A R



158 A R



170 A R



171 A R



109 A



103 A



101 A



190 A

Item#	Detailed description	Dimensions
165 A R	Small flap	H 11.02"
158 A R	Large flap	H 23.62"
170 A R	Small Delineator post	H 17.71"
171 A R	Large Delineator post	H 29.52"
109 A	PVC Weighted base for Delineator and Channelizer Posts	15.74"x2.75
103 A	PPC Weighted base for Delineator and Channelizer Posts	14.56x2.95
101 A	PPC Weighted base for Delineator and Channelizer Posts	15.74x3.93
190 A	PVC Weighted base for traffic cone	15.15"x1.96

[illegible]

Notes

[illegible]

Notes

[illegible]



North American Distribution Center

Toll Free: 1-888-906-9327

Tel: (860) 289-8033

Fax: (860) 289-8035

info@endotocorp.com

43 Franklin Street
East Hartford, CT 06108



www.endotocorp.com